


日立照明器具 照明特性

形式：LDE3201WN		反 射 率	天井	80%			70%				50%			30%			0%		
<高演色タイプ> <昼白色(5000K,Ra92)> <埋込穴Φ125>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
		0.6	0.66	0.56	0.50	0.65	0.56	0.50	0.45	0.55	0.49	0.45	0.54	0.49	0.45	0.43			
		0.8	0.76	0.67	0.61	0.75	0.66	0.61	0.56	0.65	0.60	0.56	0.64	0.59	0.56	0.54			
		1	0.82	0.74	0.68	0.81	0.73	0.68	0.64	0.72	0.67	0.63	0.71	0.66	0.63	0.61			
		1.25	0.87	0.80	0.75	0.86	0.79	0.74	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.68			
		1.5	0.91	0.85	0.80	0.90	0.84	0.79	0.76	0.82	0.78	0.75	0.81	0.77	0.75	0.73			
		2	0.96	0.91	0.87	0.94	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.84	0.81	0.79			
		2.5	0.98	0.94	0.90	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.83			
		3	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.85			
光源		4	1.02	0.99	0.96	1.01	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.91	0.88			
品名 形式 光束	LED17.5W 980 lm	5	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.94	0.93	0.91			
		7	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.97	0.94			
		10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.00	1.00	0.99	0.97			

器具効率 $F_t = 100.0\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 100.0\%$

配光分類

BZ-

最大取付間隔

A-A 1.24 H


B-B H

保守率
 良 0.75
 中 0.71
 否 0.67

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	504		
10	491		
20	464		
30	417		
40	326		
50	190		
60	82		
70	21		
80	4		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

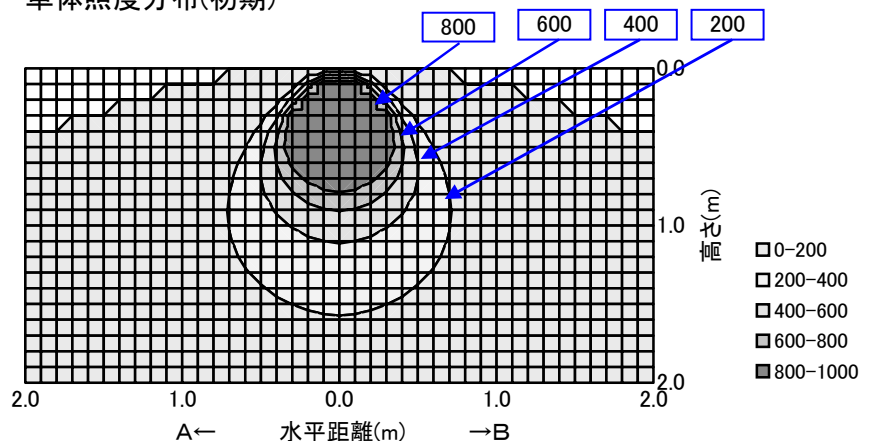

配光曲線

