

日立照明器具 照明特性

形式: LDE3203WN <昼白色(5,000K,Ra75)> <埋込穴Φ125>		天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		反射率	床	10%														0%
			室指数	照明率 S/H=1.0														


姿図		0.6	0.66	0.56	0.49	0.65	0.55	0.49	0.45	0.54	0.49	0.45	0.54	0.48	0.45	0.43
		0.8	0.76	0.67	0.60	0.75	0.66	0.60	0.56	0.65	0.59	0.55	0.64	0.59	0.55	0.53
		1	0.82	0.74	0.68	0.81	0.73	0.67	0.63	0.72	0.67	0.63	0.70	0.66	0.62	0.61
		1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.69	0.67
		1.5	0.91	0.84	0.79	0.90	0.84	0.79	0.75	0.82	0.78	0.75	0.80	0.77	0.74	0.72
		2	0.96	0.90	0.86	0.94	0.89	0.85	0.82	0.88	0.84	0.81	0.86	0.83	0.81	0.78
		2.5	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82
		3	1.00	0.96	0.92	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.84
		4	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.88
		5	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90
品名 LED16.4W 形式 光束 1,530 lm		7	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94
		10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.96

器具効率 Ft= 100.0%	
上方光束 Fu= 0.0%	
下方光束 Fd= 100.0%	
最大取付間隔	
A-A	1.22 H
B-B	H
保守率	光源寿命 (h)
	40,000 60,000
	良 0.77 0.71
	中 0.73 0.67
否 0.64 0.59	
光度 (cd/1000 lm)	
	A-0 B-B C-0 A'-0 C'-0
0	503
10	491
20	460
30	406
40	323
50	192
60	82
70	25
80	9
90	
100	
110	
120	
130	
140	
150	
160	
170	
180	

单体照度分布(初期)

配光曲线

単体照度分布(初期)

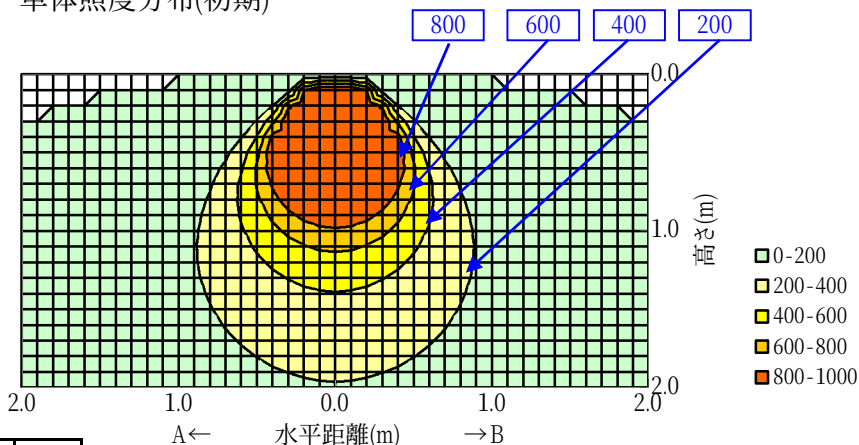

配光曲線

