


日立照明器具 照明特性

形式：LDE3300WN		反 射 率	天井	80%			70%				50%			30%			0%	
<高出力タイプ> <昼白色(5000K,Ra70)> <埋込穴Φ150>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.44	0.54	0.48	0.44	0.53	0.47	0.43	0.42		
		0.8	0.75	0.66	0.59	0.74	0.65	0.59	0.55	0.64	0.59	0.54	0.63	0.58	0.54	0.52		
		1	0.81	0.73	0.67	0.80	0.72	0.67	0.62	0.71	0.66	0.62	0.70	0.65	0.61	0.60		
		1.25	0.87	0.79	0.74	0.85	0.78	0.73	0.69	0.77	0.72	0.69	0.76	0.71	0.68	0.66		
		1.5	0.91	0.84	0.79	0.89	0.83	0.78	0.75	0.82	0.77	0.74	0.80	0.76	0.73	0.71		
		2	0.95	0.90	0.86	0.94	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.80	0.78		
		2.5	0.98	0.93	0.90	0.96	0.92	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82		
		3	0.99	0.96	0.92	0.98	0.95	0.91	0.89	0.93	0.90	0.88	0.91	0.89	0.86	0.84		
光源		4	1.02	0.99	0.96	1.00	0.97	0.95	0.93	0.95	0.93	0.91	0.94	0.92	0.90	0.88		
品名	LED17.5W	5	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90		
形式		7	1.05	1.03	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94		
光束	1,450 lm	10	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.96		

器具効率 $F_t = 100.0\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 100.0\%$

配光分類

BZ-

最大取付間隔

A-A 1.24 H


B-B H

保守率	良	0.75
	中	0.71
	否	0.67

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	485		
10	473		
20	445		
30	400		
40	318		
50	199		
60	96		
70	28		
80	2		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

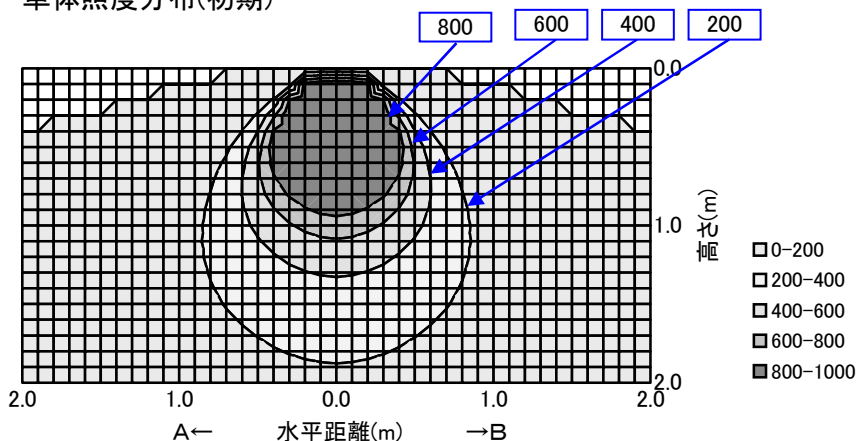

配光曲線

