

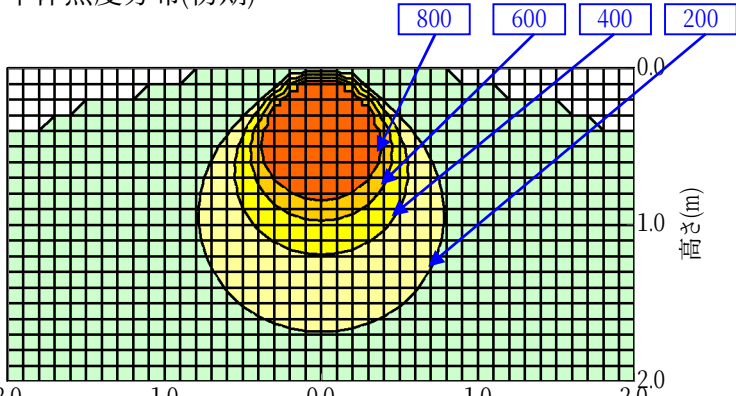


日立照明器具 照明特性

形式: LDE3303WL <電球色(3,000K,Ra85)> <埋込穴Φ150>		天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
姿図 	0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.44	0.53	0.48	0.43	0.52	0.47	0.43	0.42	
	0.8	0.75	0.66	0.60	0.74	0.65	0.59	0.55	0.64	0.59	0.55	0.63	0.58	0.54	0.53	
	1	0.82	0.73	0.67	0.80	0.72	0.67	0.62	0.71	0.66	0.62	0.70	0.65	0.62	0.60	
	1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.69	0.77	0.73	0.69	0.76	0.72	0.68	0.67	
	1.5	0.91	0.84	0.79	0.89	0.83	0.79	0.75	0.82	0.78	0.74	0.80	0.77	0.74	0.72	
	2	0.95	0.90	0.86	0.94	0.89	0.85	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78	
	2.5	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82	
	3	1.00	0.96	0.92	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.84	
光源		4	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.88
品名	LED16.4W	5	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90
形式		7	1.05	1.03	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94
光束	1,200 lm	10	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.96

器具効率 Ft= 100.0%		单体照度分布(初期) 							
上方光束 Fu= 0.0%									
下方光束 Fd= 100.0%									
最大取付間隔									
A-A 1.30 H									
B-B H									
保守率	光源寿命 (h)						40,000	60,000	
		良	0.77	0.71					
	中	0.73	0.67						
	否	0.64	0.59						
光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0	配光曲線 		
0	470								
10	465								
20	443								
30	396								
40	324								
50	219								
60	91								
70	14								
80	4								
90									
100									
110									
120									
130									
140									
150									
160									
170									
180									

配光曲線

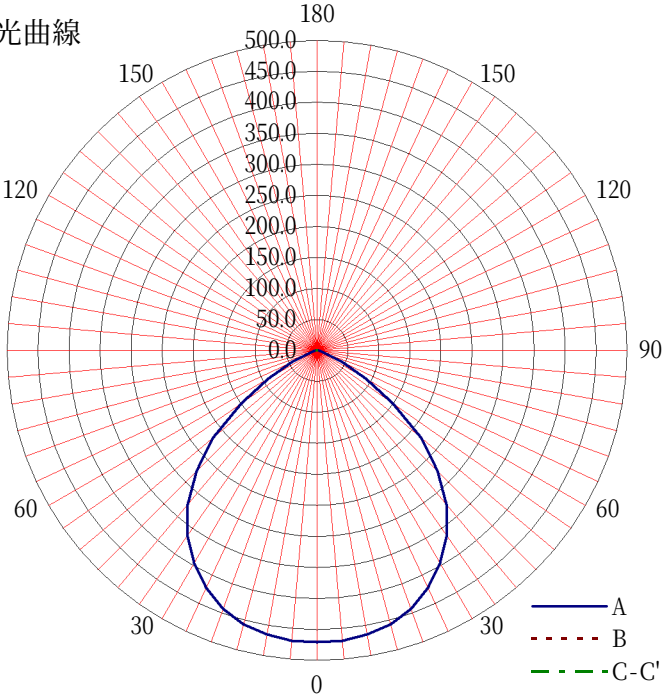