



日立照明器具 照明特性

形式: LDE3303WN <昼白色(5,000K,Ra75)> <埋込穴Φ150>		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
	0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.44	0.53	0.48	0.43	0.52	0.47	0.43	0.42			
	0.8	0.75	0.66	0.60	0.74	0.65	0.59	0.55	0.64	0.59	0.55	0.63	0.58	0.54	0.53			
	1	0.82	0.73	0.67	0.80	0.72	0.67	0.62	0.71	0.66	0.62	0.70	0.65	0.62	0.60			
	1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.69	0.77	0.73	0.69	0.76	0.72	0.68	0.67			
	1.5	0.91	0.84	0.79	0.89	0.83	0.79	0.75	0.82	0.78	0.74	0.80	0.77	0.74	0.72			
	2	0.95	0.90	0.86	0.94	0.89	0.85	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78			
	2.5	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82			
	3	1.00	0.96	0.92	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.84			
	4	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.88			
光源		4	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.88		
品名	LED16.4W	5	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90		
形式		7	1.05	1.03	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94		
光束	1,570 lm	10	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.96		

器具効率 Ft=	100.0%
上方光束 Fu=	0.0%
下方光束 Fd=	100.0%
最大取付間隔	
A-A	1.26 H
B-B	H
保守率	光源寿命 (h)
	40,000 60,000
	良 0.77 0.71
	中 0.73 0.67
保守率	否 0.64 0.59

単体照度分布(初期)

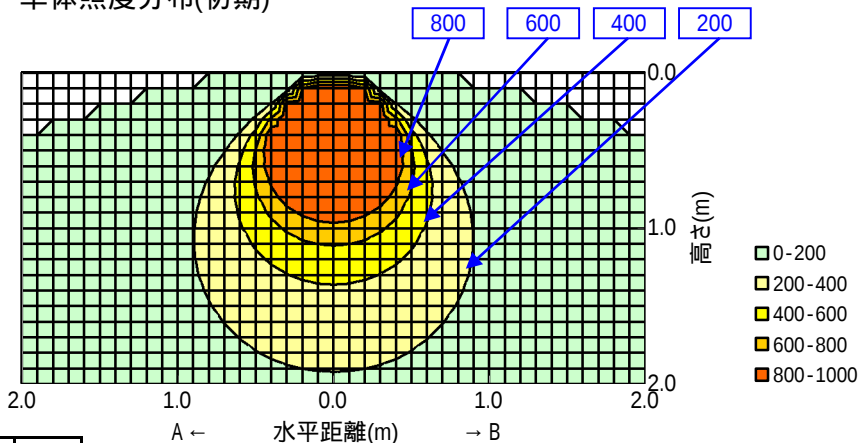

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	470				
10	465				
20	443				
30	396				
40	324				
50	219				
60	91				
70	14				
80	4				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線

