

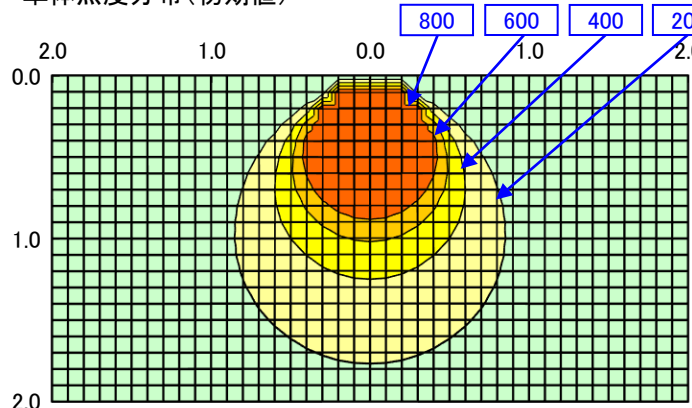


日立照明器具 照明特性

名称: LEDダウンライト	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%													0%			
形式: LDE3304WL	室指数	固有照明率 S/H=1.0																	
＜備考＞	0.6	0.63	0.52	0.45	0.62	0.51	0.45	0.40	0.50	0.44	0.40	0.49	0.44	0.40	0.38				
	0.8	0.73	0.63	0.56	0.72	0.62	0.56	0.51	0.61	0.55	0.51	0.60	0.55	0.51	0.49				
姿図 	1	0.80	0.71	0.64	0.78	0.70	0.64	0.59	0.68	0.63	0.59	0.67	0.62	0.58	0.56				
	1.25	0.85	0.77	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.66	0.64				
	1.5	0.90	0.82	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.72	0.78	0.74	0.71	0.69				
	2	0.95	0.89	0.84	0.93	0.88	0.84	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76				
	2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.86	0.84	0.88	0.85	0.83	0.80				
	3	0.99	0.95	0.91	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.83				
	4	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87				
光源形式 -	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90				
器具光束 1,480 lm	7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93				
	10	1.07	1.06	1.05	1.06	1.04	1.03	1.02	1.02	1.01	1.01	1.00	1.00	0.99	0.96				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
		最大取付間隔 A-A 1.30 H B-B H																	
保守率	良															0.79			
	中															0.75			
	否	0.67																	
光度 (cd/1000 lm)																			
	A-0															B-B	C-0	A'-0	C'-0
0	421																		
10	417																		
20	398																		
30	366																		
40	310																		
50	228																		
60	130																		
70	27																		
80	4																		
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			

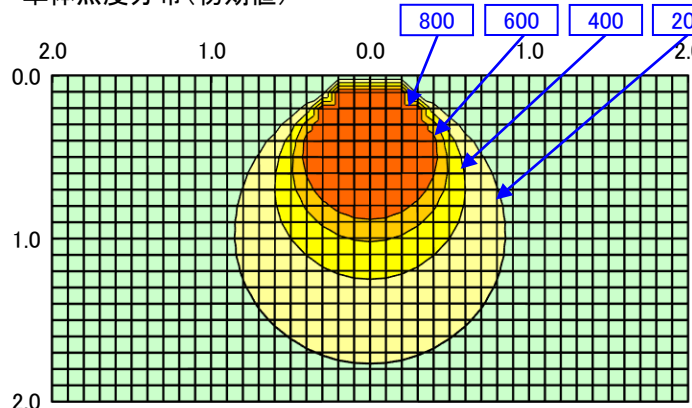