

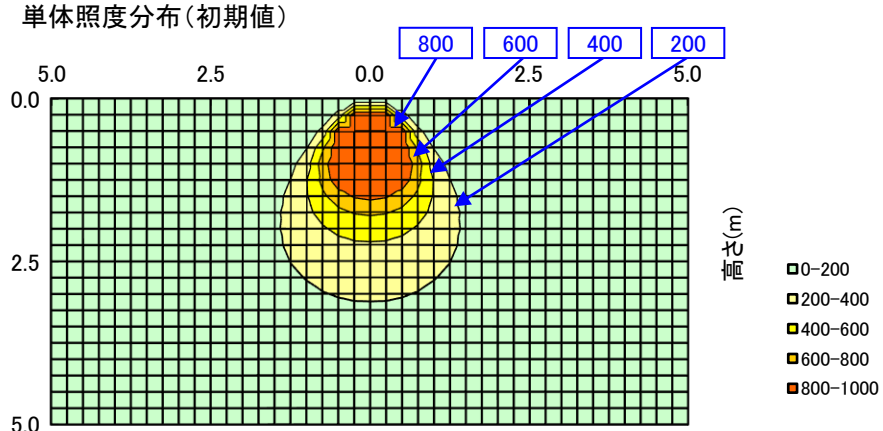


日立照明器具 照明特性

名称: LEDダウンライト	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: LDE34AMN-JX14A	室指数	固有照明率 S/H=1.0														
〈備考〉	0.6	0.68	0.58	0.52	0.67	0.57	0.51	0.47	0.56	0.51	0.47	0.56	0.51	0.47	0.45	
	0.8	0.77	0.68	0.62	0.76	0.68	0.62	0.58	0.67	0.62	0.58	0.66	0.61	0.57	0.56	
姿図 	1	0.83	0.75	0.70	0.82	0.75	0.69	0.65	0.73	0.68	0.65	0.72	0.68	0.64	0.63	
	1.25	0.88	0.81	0.76	0.87	0.81	0.76	0.72	0.79	0.75	0.71	0.78	0.74	0.71	0.69	
	1.5	0.92	0.86	0.81	0.91	0.85	0.80	0.77	0.83	0.79	0.76	0.82	0.78	0.76	0.74	
	2	0.96	0.91	0.87	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.80	
	2.5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.88	0.85	0.83	
	3	1.00	0.97	0.93	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86	
光源形式	4	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.93	0.91	0.89	
-	5	1.04	1.01	0.99	1.03	1.00	0.98	0.97	0.98	0.97	0.95	0.96	0.95	0.94	0.91	
器具光束	7	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94	
3,800 lm	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.02	1.01	1.00	1.00	0.97	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A		1.26	H													
B-B			H													
保守率	良	0.79														
	中	0.75														
	否	0.67														
光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0										
0	509															
10	510															
20	491															
30	441															
40	325															
50	169															
60	71															
70	26															
80	4															
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																

配光曲線
(cd/1000 lm)

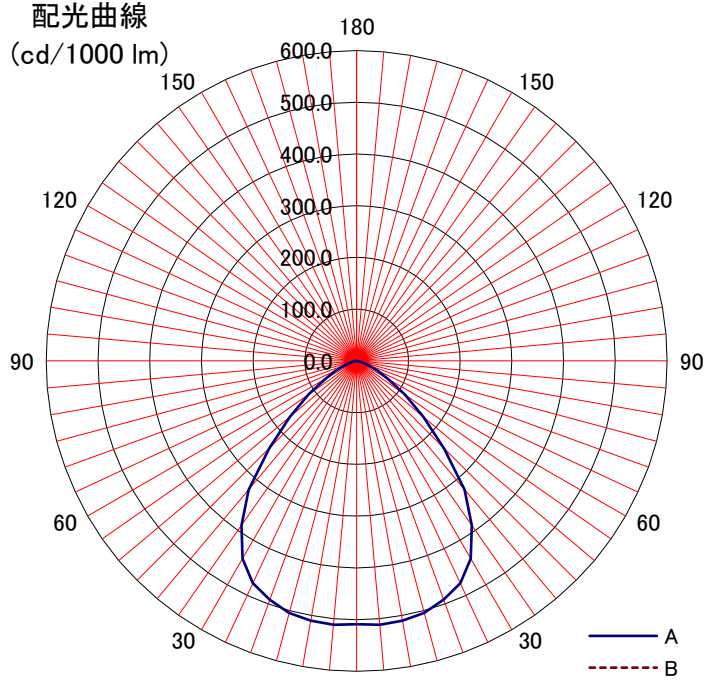

180
150
120
90
60
30
0

600.0
500.0
400.0
300.0
200.0
100.0
0.0

A
B
C-C'

配光曲線
(cd/1000 lm)

