



日立照明器具 照明特性

形式：LDE4203WL <電球色(3,000K,Ra85)> <埋込穴φ125>		反 射 率	天井	80%			70%				50%			30%			0%	
			壁 床	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
				10%														0%
				室指数	照明率 S/H=1.0													
	0.6	0.66	0.56	0.49	0.65	0.55	0.49	0.45	0.54	0.49	0.45	0.54	0.48	0.45	0.43			
	0.8	0.76	0.67	0.60	0.75	0.66	0.60	0.56	0.65	0.60	0.55	0.64	0.59	0.55	0.54			
	1	0.82	0.74	0.68	0.81	0.73	0.67	0.63	0.72	0.67	0.63	0.70	0.66	0.62	0.61			
	1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.69	0.67			
	1.5	0.91	0.84	0.79	0.90	0.84	0.79	0.75	0.82	0.78	0.75	0.80	0.77	0.74	0.72			
	2	0.96	0.90	0.86	0.94	0.89	0.85	0.82	0.88	0.84	0.81	0.86	0.83	0.81	0.78			
	2.5	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82			
	3	1.00	0.96	0.92	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.84			
光源		4	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.88		
品名	LED20.6W	5	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90		
形式		7	1.05	1.03	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94		
光束	1,460 lm	10	1.07	1.06	1.05	1.05	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.96		

器具効率 Ft=		100.0%	
上方光束 Fu=		0.0%	
下方光束 Fd=		100.0%	
最大取付間隔			
A-A		1.22 H	
B-B		H	
保守率		光源寿命 (h)	
		40,000	60,000
	良	0.77	0.71
	中	0.73	0.67
	否	0.64	0.59

単体照度分布(初期)

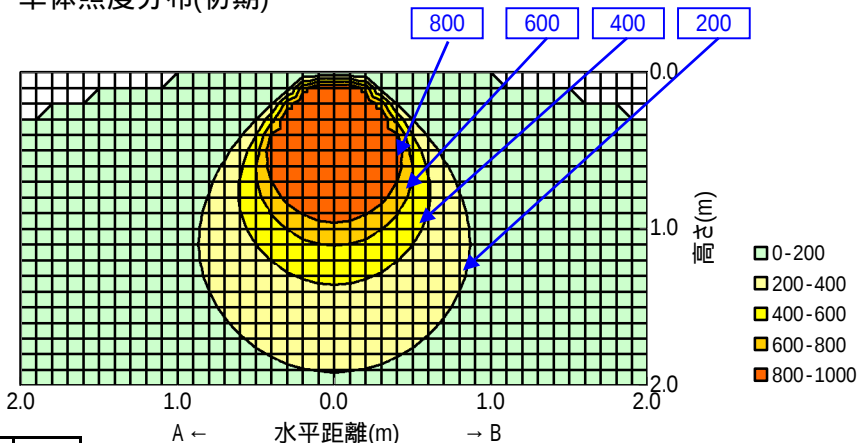

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	502				
10	491				
20	460				
30	407				
40	325				
50	194				
60	79				
70	25				
80	9				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線

