
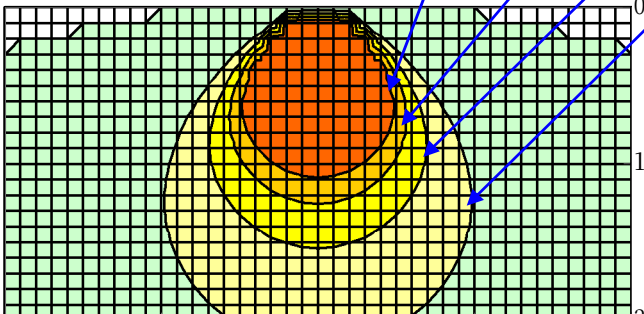


日立照明器具 照明特性

形式: LDE4203WN <昼白色(5,000K,Ra75)> <埋込穴Φ125>		天井	80%			70%				50%			30%			0%		
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
		反射率	壁															0%
			床	10%														0%
		室指数	照明率 S/H=1.0															

姿図 	0.6	0.66	0.56	0.49	0.65	0.55	0.49	0.45	0.54	0.49	0.45	0.54	0.48	0.45	0.43
	0.8	0.76	0.67	0.60	0.75	0.66	0.60	0.56	0.65	0.60	0.55	0.64	0.59	0.55	0.54
	1	0.82	0.74	0.68	0.81	0.73	0.67	0.63	0.72	0.67	0.63	0.70	0.66	0.62	0.61
	1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.69	0.67
	1.5	0.91	0.84	0.79	0.90	0.84	0.79	0.75	0.82	0.78	0.75	0.80	0.77	0.74	0.72
	2	0.96	0.90	0.86	0.94	0.89	0.85	0.82	0.88	0.84	0.81	0.86	0.83	0.81	0.78
	2.5	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82
	3	1.00	0.96	0.92	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.84
	4	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.88
	5	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90


光源		7	1.05	1.03	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94	
品名		LED19.5W	10	1.07	1.06	1.05	1.05	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.96
形式																	
光束		1,880 lm															

器具効率 Ft= 100.0%			单体照度分布(初期) 													
上方光束 Fu= 0.0%																
下方光束 Fd= 100.0%																
最大取付間隔																
A-A 1.22 H																
B-B H																

保守率	光源寿命 (h) 40,00060,000															
		良	0.77	0.71												
		中	0.73	0.67												
		否	0.64	0.59												
光度 (cd/1000 lm)																

	A-0	B-B	C-0	A'-0	C'-0
0	502				
10	491				
20	460				
30	407				
40	325				
50	194				
60	79				
70	25				
80	9				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線

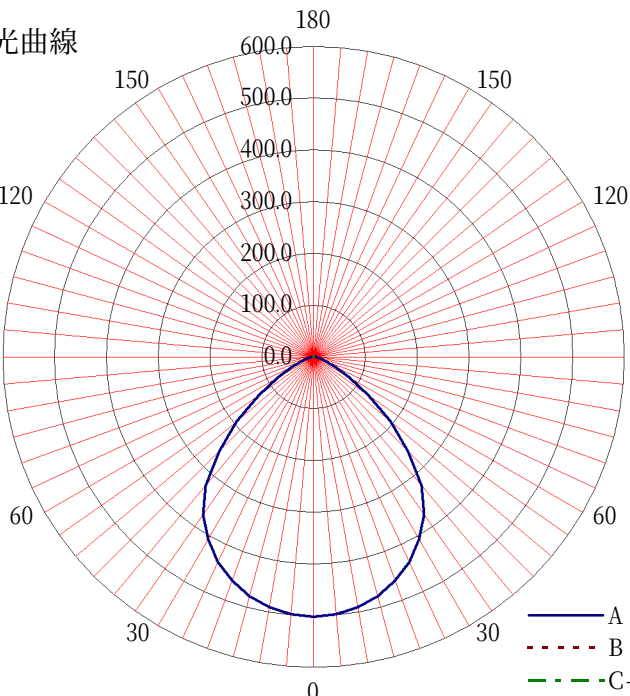

配光曲線

