



日立照明器具 照明特性

形式: LDE4303WL <電球色(3,000K,Ra85)> <埋込穴φ150>	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
	室指数		照明率 S/H=1.0													
姿図 	0.6		0.65	0.55	0.48	0.64	0.54	0.48	0.44	0.53	0.48	0.43	0.53	0.47	0.43	0.42
	0.8		0.75	0.66	0.60	0.74	0.65	0.59	0.55	0.64	0.59	0.55	0.63	0.58	0.54	0.53
	1		0.82	0.73	0.67	0.80	0.73	0.67	0.63	0.71	0.66	0.62	0.70	0.65	0.62	0.60
	1.25		0.87	0.80	0.74	0.86	0.79	0.74	0.70	0.77	0.73	0.69	0.76	0.72	0.69	0.67
	1.5		0.91	0.84	0.79	0.90	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.77	0.74	0.72
	2		0.96	0.90	0.86	0.94	0.89	0.85	0.82	0.88	0.84	0.81	0.86	0.83	0.81	0.78
	2.5		0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.87	0.84	0.82
	3		1.00	0.96	0.92	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.84
	4		1.02	0.99	0.96	1.01	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.88
	5		1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90
品名	LED20.6W		7	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96
形式			10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.00	1.00	0.99
光束	1,500 lm															

器具効率 Ft= 100.0%	
上方光束 Fu= 0.0%	
下方光束 Fd= 100.0%	
最大取付間隔	
A-A	1.26 H
B-B	H
保守率	光源寿命 (h)
	40,000 60,000
	良 0.77 0.71
	中 0.73 0.67
否	0.64 0.59

単体照度分布(初期)

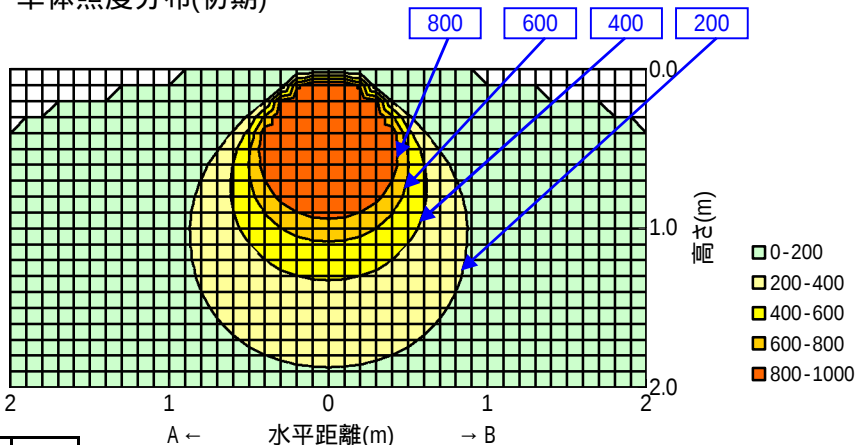

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	467				
10	464				
20	445				
30	397				
40	320				
50	222				
60	92				
70	12				
80	6				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線

