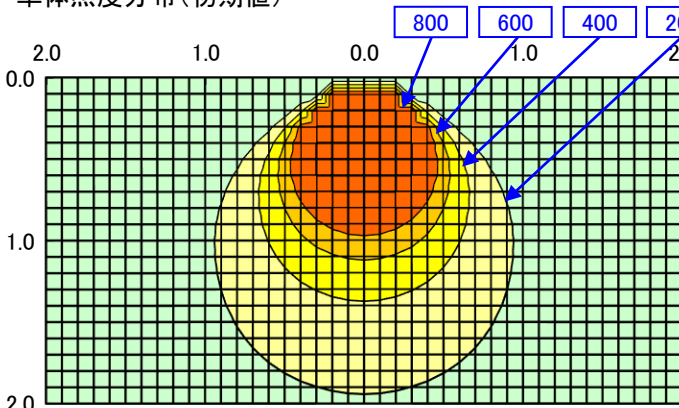
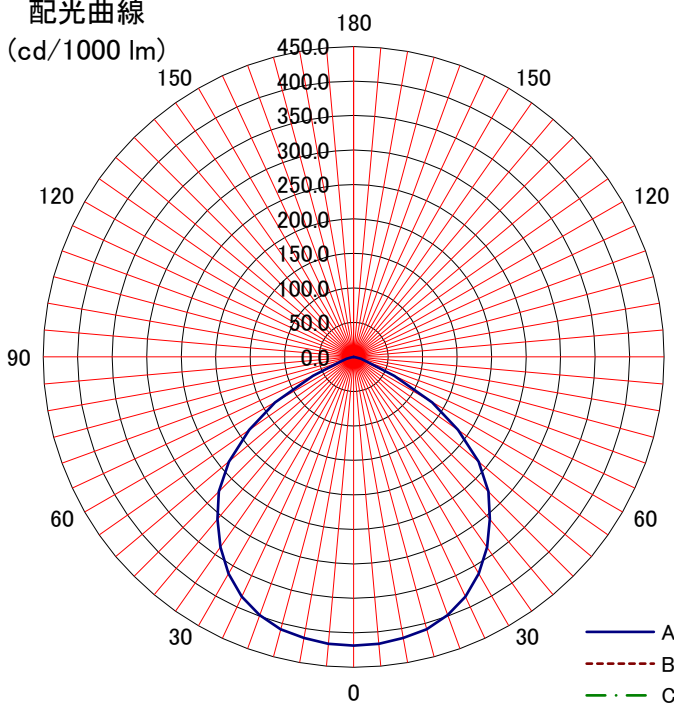


日立照明器具 照明特性

名称: LEDダウンライト	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
			床	10%														0%																																																																																																																					
形式: LDE4304WL	室指数	固有照明率 S/H=1.0																																																																																																																																					
〈備考〉	0.6	0.63	0.52	0.45	0.62	0.51	0.45	0.40	0.50	0.44	0.40	0.49	0.44	0.40	0.38																																																																																																																								
	0.8	0.73	0.63	0.56	0.72	0.62	0.56	0.51	0.61	0.55	0.51	0.60	0.55	0.51	0.49																																																																																																																								
姿図	1	0.80	0.71	0.64	0.78	0.70	0.64	0.59	0.68	0.63	0.59	0.67	0.62	0.58	0.56																																																																																																																								
	1.25	0.85	0.77	0.71	0.84	0.77	0.71	0.67	0.75	0.70	0.66	0.73	0.69	0.66	0.64																																																																																																																								
	1.5	0.90	0.83	0.77	0.88	0.82	0.77	0.72	0.80	0.75	0.72	0.78	0.74	0.71	0.69																																																																																																																								
	2	0.95	0.89	0.84	0.93	0.88	0.84	0.80	0.86	0.82	0.79	0.84	0.81	0.79	0.76																																																																																																																								
	2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.86	0.84	0.88	0.85	0.83	0.80																																																																																																																								
	3	0.99	0.95	0.91	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.83																																																																																																																								
光源形式	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87																																																																																																																								
-	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90																																																																																																																								
器具光束	7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93																																																																																																																								
1,800 lm	10	1.07	1.06	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	1.00	0.99	0.96																																																																																																																								
器具効率 Ft= 100%		単体照度分布 (初期値)  単位: lx 0-200 200-400 400-600 600-800 800-1000																																																																																																																																					
上方光束 Fu= 0%																																																																																																																																							
下方光束 Fd= 100%																																																																																																																																							
最大取付間隔		光 度 (cd/1000 lm) <table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>419</td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td>414</td><td></td><td></td><td></td><td></td></tr><tr><td>20</td><td>398</td><td></td><td></td><td></td><td></td></tr><tr><td>30</td><td>363</td><td></td><td></td><td></td><td></td></tr><tr><td>40</td><td>307</td><td></td><td></td><td></td><td></td></tr><tr><td>50</td><td>236</td><td></td><td></td><td></td><td></td></tr><tr><td>60</td><td>131</td><td></td><td></td><td></td><td></td></tr><tr><td>70</td><td>22</td><td></td><td></td><td></td><td></td></tr><tr><td>80</td><td>4</td><td></td><td></td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	419					10	414					20	398					30	363					40	307					50	236					60	131					70	22					80	4					90						100						110						120						130						140						150						160						170						180					
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
0	419																																																																																																																																						
10	414																																																																																																																																						
20	398																																																																																																																																						
30	363																																																																																																																																						
40	307																																																																																																																																						
50	236																																																																																																																																						
60	131																																																																																																																																						
70	22																																																																																																																																						
80	4																																																																																																																																						
90																																																																																																																																							
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							
A-A 1.28 H																																																																																																																																							
B-B H																																																																																																																																							
保守率	良	0.79																																																																																																																																					
	中	0.75																																																																																																																																					
	否	0.67																																																																																																																																					
配光曲線 (cd/1000 lm)		 単位: cd/1000 lm 0 30 60 90 120 150 180 A (実線) B (点線) C-C' (点線)																																																																																																																																					