
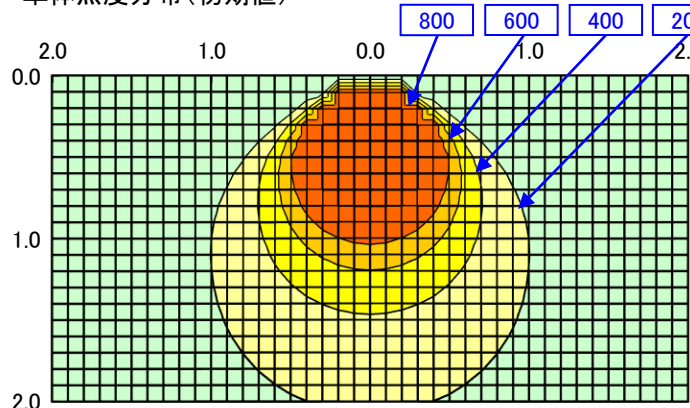
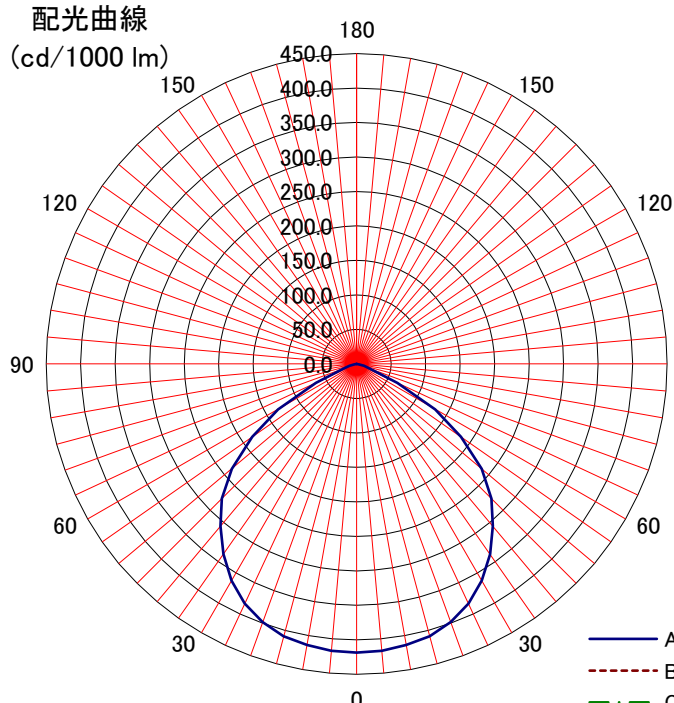


日立照明器具 照明特性

名称: LEDダウンライト	反射率	天井	80%				70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
		床	10%														0%	
形式: LDE4304WN	室指数	固有照明率 S/H=1.0																
＜備考＞	0.6	0.63	0.52	0.45	0.62	0.51	0.45	0.40	0.50	0.44	0.40	0.49	0.44	0.40	0.38			
	0.8	0.73	0.63	0.56	0.72	0.62	0.56	0.51	0.61	0.55	0.51	0.60	0.55	0.51	0.49			
姿図 	1	0.80	0.71	0.64	0.78	0.70	0.64	0.59	0.68	0.63	0.59	0.67	0.62	0.58	0.56			
	1.25	0.85	0.77	0.71	0.84	0.77	0.71	0.67	0.75	0.70	0.66	0.73	0.69	0.66	0.64			
	1.5	0.90	0.83	0.77	0.88	0.82	0.77	0.72	0.80	0.75	0.72	0.78	0.74	0.71	0.69			
	2	0.95	0.89	0.84	0.93	0.88	0.84	0.80	0.86	0.82	0.79	0.84	0.81	0.79	0.76			
	2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.86	0.84	0.88	0.85	0.83	0.80			
	3	0.99	0.95	0.91	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.83			
	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87			
光源形式 -	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90			
器具光束 2,050 lm	7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93			
	10	1.07	1.06	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	1.00	0.99	0.96			
器具効率 Ft= 100%		単体照度分布(初期値) 																
上方光束 Fu= 0%																		
下方光束 Fd= 100%																		
最大取付間隔		配光曲線 (cd/1000 lm) 																
A-A 1.28 H																		
B-B H																		
保守率																		
良	0.79																	
中	0.75																	
否	0.67																	
光度 (cd/1000 lm)																		
A-0	B-B															C-0	A'-0	C'-0
0	419																	
10	414																	
20	398																	
30	363																	
40	307																	
50	236																	
60	131																	
70	22																	
80	4																	
90																		
100																		
110																		
120																		
130																		
140																		
150																		
160																		
170																		
180																		