

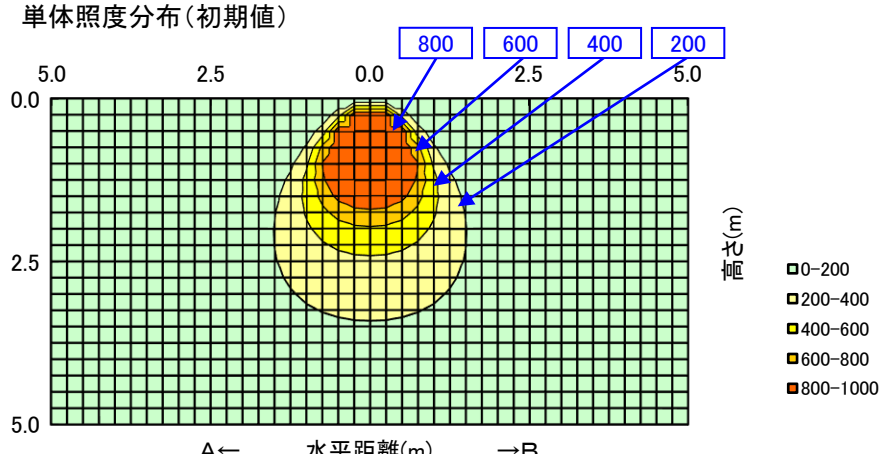


日立照明器具 照明特性


名称: LEDダウンライト	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: LDE54AML-JX14A	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.68	0.58	0.52	0.67	0.58	0.52	0.47	0.57	0.51	0.47	0.56	0.51	0.47	0.46	
	0.8	0.77	0.69	0.63	0.76	0.68	0.62	0.58	0.67	0.62	0.58	0.66	0.61	0.58	0.56	
姿図 	1	0.83	0.75	0.70	0.82	0.75	0.69	0.65	0.73	0.68	0.65	0.72	0.68	0.64	0.63	
	1.25	0.88	0.81	0.76	0.87	0.80	0.75	0.72	0.79	0.75	0.71	0.78	0.74	0.71	0.69	
	1.5	0.92	0.86	0.81	0.90	0.85	0.80	0.77	0.83	0.79	0.76	0.82	0.78	0.75	0.74	
	2	0.96	0.91	0.87	0.95	0.90	0.87	0.83	0.89	0.85	0.83	0.87	0.84	0.82	0.80	
	2.5	0.99	0.94	0.91	0.97	0.93	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.83	
	3	1.00	0.96	0.93	0.99	0.95	0.92	0.90	0.93	0.91	0.89	0.92	0.89	0.88	0.85	
	4	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88	
光源形式 -	5	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91	
器具光束 4,500 lm	7	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.94	
	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.99	0.97	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.24 H																
B-B H																
保守率	良	0.79														
	中	0.75														
	否	0.67														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	516															
10	516															
20	501															
30	437															
40	315															
50	169															
60	70															
70	27															
80	6															
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																

配光曲線
(cd/1000 lm)

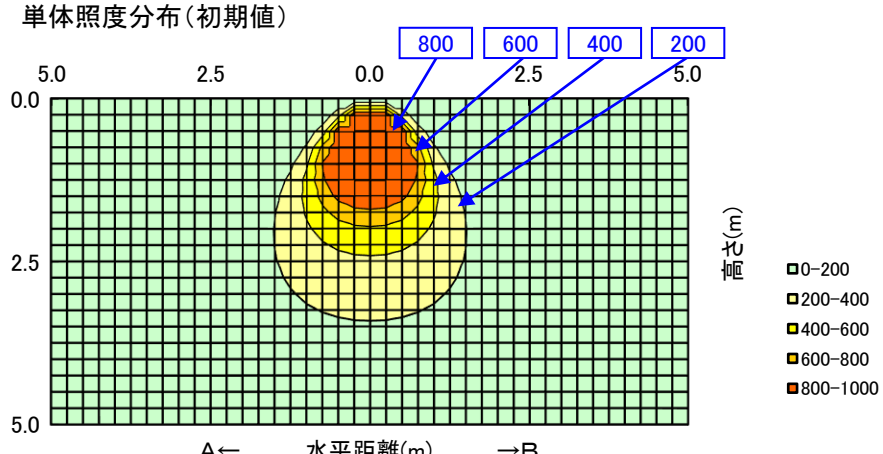

0-200
200-400
400-600
600-800
800-1000

配光曲線
(cd/1000 lm)

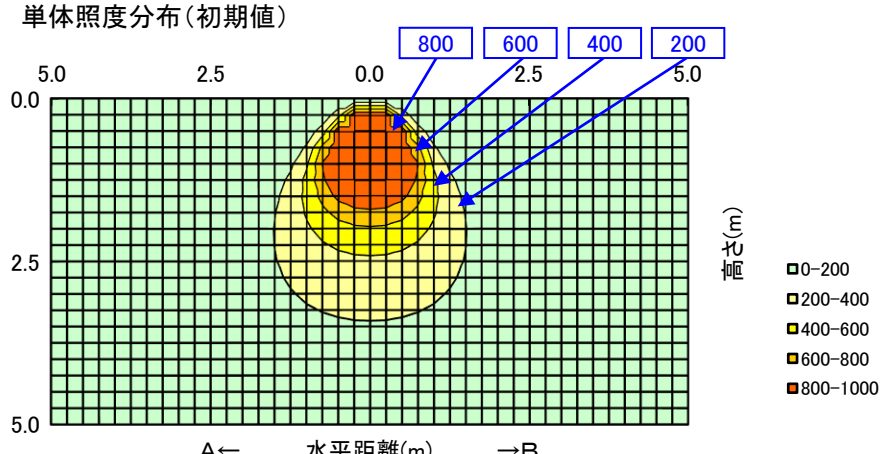

0-200
200-400
400-600
600-800
800-1000

