
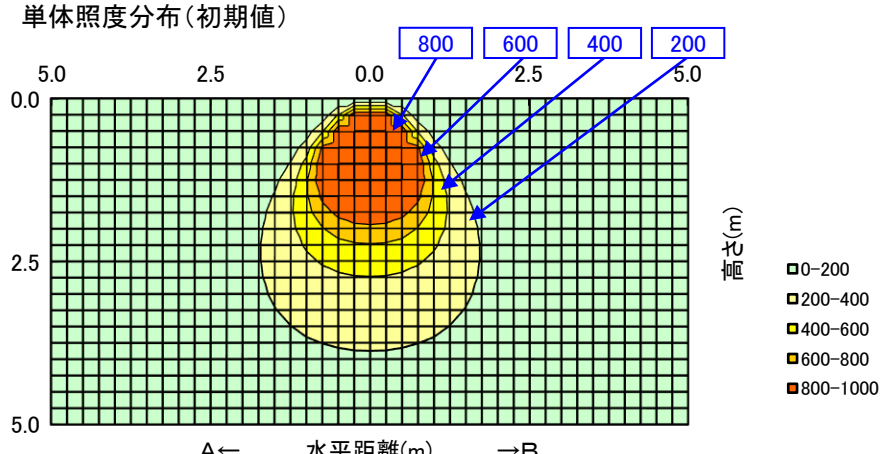
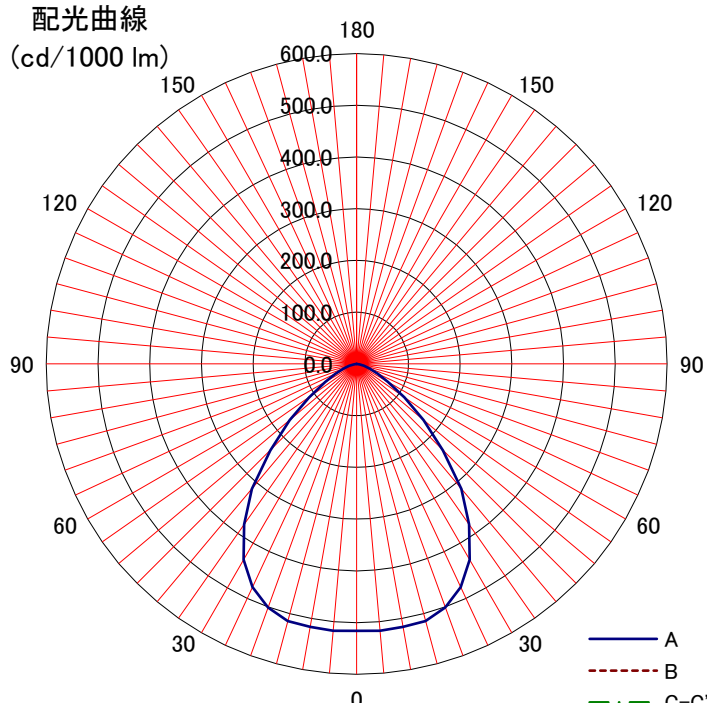


日立照明器具 照明特性

名称: LEDダウンライト	反射率	天井	80%				70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
		床	10%														0%	
形式: LDE54AMN-JX14A	室指数	固有照明率 S/H=1.0																
＜備考＞	0.6	0.68	0.58	0.52	0.67	0.58	0.52	0.47	0.57	0.51	0.47	0.56	0.51	0.47	0.46			
	0.8	0.77	0.69	0.63	0.76	0.68	0.62	0.58	0.67	0.62	0.58	0.66	0.61	0.58	0.56			
姿図 	1	0.83	0.75	0.70	0.82	0.75	0.69	0.65	0.73	0.68	0.65	0.72	0.68	0.64	0.63			
	1.25	0.88	0.81	0.76	0.87	0.80	0.75	0.72	0.79	0.75	0.71	0.78	0.74	0.71	0.69			
	1.5	0.92	0.86	0.81	0.90	0.85	0.80	0.77	0.83	0.79	0.76	0.82	0.78	0.75	0.74			
	2	0.96	0.91	0.87	0.95	0.90	0.87	0.83	0.89	0.85	0.83	0.87	0.84	0.82	0.80			
	2.5	0.99	0.94	0.91	0.97	0.93	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.83			
	3	1.00	0.96	0.93	0.99	0.95	0.92	0.90	0.93	0.91	0.89	0.92	0.89	0.88	0.85			
光源形式 -	4	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88			
	5	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91			
器具光束 5,800 lm	7	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.94			
	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.99	0.97			
器具効率 Ft= 100%		単体照度分布(初期値) 																
上方光束 Fu= 0%																		
下方光束 Fd= 100%																		
最大取付間隔		配光曲線 (cd/1000 lm) 																
A-A 1.24 H																		
B-B H																		
保守率																		
良	0.79																	
中	0.75																	
否	0.67																	
光度 (cd/1000 lm)																		
A-0	B-B															C-0	A'-0	C'-0
0	516																	
10	516																	
20	501																	
30	437																	
40	315																	
50	169																	
60	70																	
70	27																	
80	6																	
90																		
100																		
110																		
120																		
130																		
140																		
150																		
160																		
170																		
180																		