
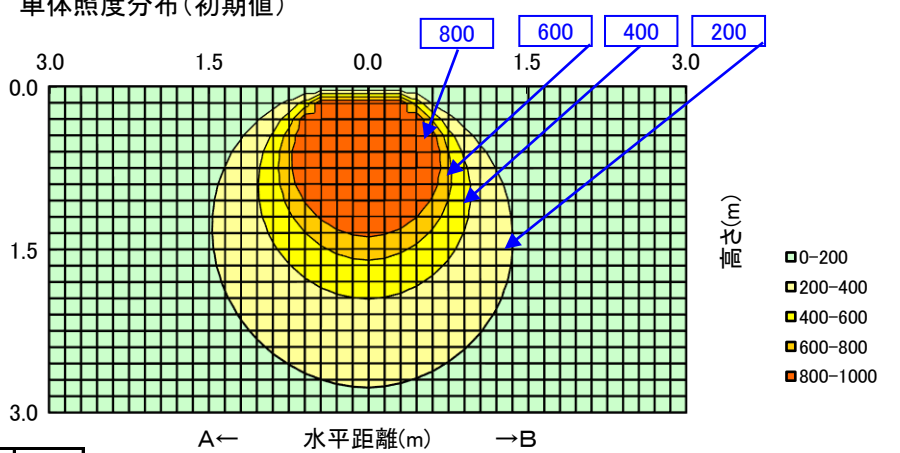
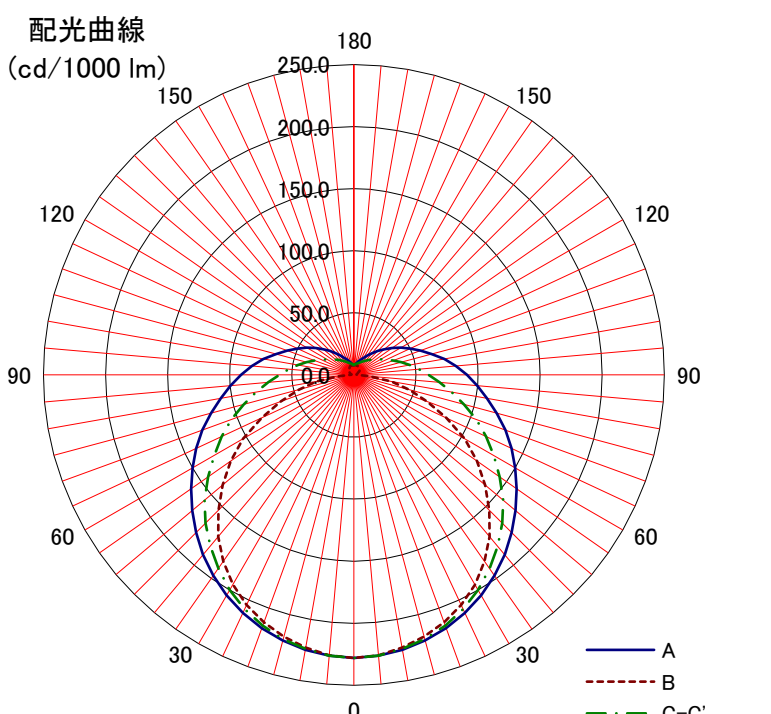


日立照明器具 照明特性

名称: 直管形LEDランプ	天井 反射率	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: LDK110SS-D/42/67NE	室指数	照明率 S/H=1.0														
<備考> FLR110形 定格出力タイプ (昼光色)	0.6	0.52	0.40	0.32	0.50	0.39	0.31	0.26	0.36	0.30	0.25	0.34	0.28	0.24	0.21	
	0.8	0.61	0.49	0.41	0.59	0.48	0.40	0.34	0.45	0.38	0.33	0.42	0.36	0.31	0.28	
姿図 	1	0.67	0.56	0.48	0.65	0.54	0.46	0.40	0.50	0.44	0.39	0.47	0.41	0.37	0.33	
	1.25	0.73	0.62	0.54	0.70	0.60	0.53	0.47	0.56	0.50	0.45	0.53	0.47	0.43	0.38	
	1.5	0.77	0.68	0.60	0.74	0.65	0.58	0.52	0.61	0.55	0.50	0.57	0.52	0.48	0.43	
	2	0.83	0.75	0.68	0.80	0.72	0.66	0.60	0.67	0.62	0.57	0.63	0.58	0.55	0.49	
	2.5	0.87	0.79	0.73	0.83	0.77	0.71	0.66	0.72	0.67	0.62	0.67	0.63	0.59	0.53	
	3	0.89	0.82	0.77	0.86	0.80	0.74	0.70	0.75	0.70	0.66	0.70	0.66	0.63	0.56	
	4	0.92	0.87	0.82	0.89	0.84	0.80	0.76	0.79	0.75	0.72	0.74	0.71	0.68	0.61	
光源	5	0.95	0.90	0.86	0.91	0.87	0.83	0.80	0.82	0.78	0.75	0.76	0.74	0.71	0.65	
品名 直管形LEDランプ	7	0.97	0.94	0.91	0.94	0.91	0.88	0.85	0.85	0.83	0.81	0.80	0.78	0.76	0.69	
形式 LDK110SS-D/42/67NE	10	1.00	0.97	0.95	0.96	0.94	0.92	0.90	0.88	0.87	0.85	0.83	0.82	0.80	0.73	
光束 6,730 lm																
器具効率 Ft=		単体照度分布(初期値) 														
上方光束 Fu=																
下方光束 Fd=																
最大取付間隔		配光曲線 (cd/1000 lm) 														
A-A 1.36 H																
B-B 1.28 H																
保守率																
良		光度 (cd/1000 lm)														
中																
否																