



日立照明器具 照明特性


名称: 直管形LEDランプ [®]	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: LDK110SS-N/42/69NE	室指数	照明率 S/H=1.0														
<備考> FLR110形 定格出力タイプ [®] (昼白色)	0.6	0.52	0.40	0.32	0.50	0.39	0.31	0.26	0.36	0.30	0.25	0.34	0.28	0.24	0.21	
	0.8	0.61	0.49	0.41	0.59	0.48	0.40	0.34	0.45	0.38	0.33	0.42	0.36	0.31	0.28	
姿図 	1	0.67	0.56	0.48	0.65	0.54	0.46	0.40	0.50	0.44	0.39	0.47	0.41	0.37	0.33	
	1.25	0.73	0.62	0.54	0.70	0.60	0.53	0.47	0.56	0.50	0.45	0.53	0.47	0.43	0.38	
	1.5	0.77	0.68	0.60	0.74	0.65	0.58	0.52	0.61	0.55	0.50	0.57	0.52	0.48	0.43	
	2	0.83	0.75	0.68	0.80	0.72	0.66	0.60	0.67	0.62	0.57	0.63	0.58	0.55	0.49	
	2.5	0.87	0.79	0.73	0.83	0.77	0.71	0.66	0.72	0.67	0.62	0.67	0.63	0.59	0.53	
	3	0.89	0.82	0.77	0.86	0.80	0.74	0.70	0.75	0.70	0.66	0.70	0.66	0.63	0.56	
	4	0.92	0.87	0.82	0.89	0.84	0.80	0.76	0.79	0.75	0.72	0.74	0.71	0.68	0.61	
光源	5	0.95	0.90	0.86	0.91	0.87	0.83	0.80	0.82	0.78	0.75	0.76	0.74	0.71	0.65	
品名 直管形LEDランプ [®]	7	0.97	0.94	0.91	0.94	0.91	0.88	0.85	0.85	0.83	0.81	0.80	0.78	0.76	0.69	
形式 LDK110SS-N/42/69NE	10	1.00	0.97	0.95	0.96	0.94	0.92	0.90	0.88	0.87	0.85	0.83	0.82	0.80	0.73	
光束 6,950 lm																

器具効率 Ft=	
上方光束 Fu=	
下方光束 Fd=	
最大取付間隔	
A-A	1.36 H
B-B	1.28 H
保守率	良 中 否

単体照度分布(初期値)

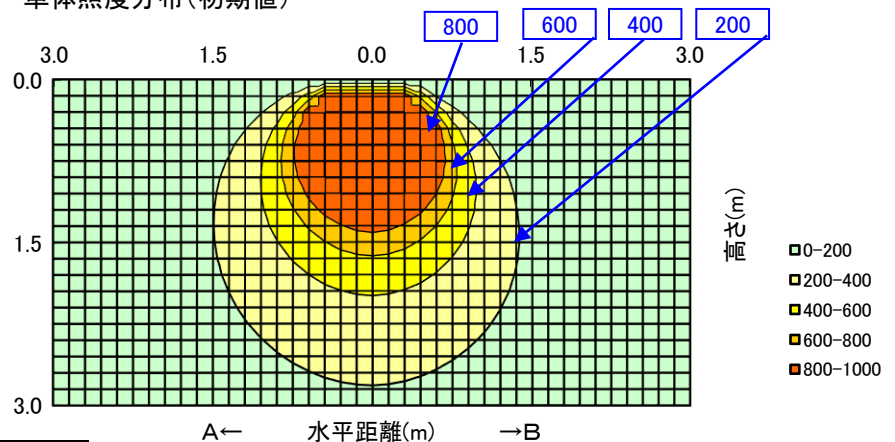

配光曲線
(cd/1000 lm)

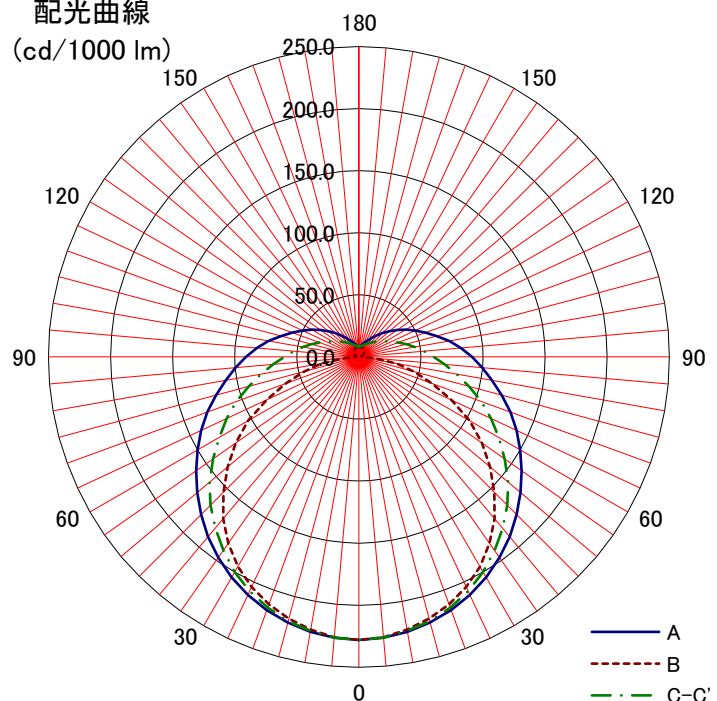

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	228	228	228		
10	225	223	224		
20	217	212	215		
30	205	195	200		
40	189	170	180		
50	170	138	157		
60	150	103	130		
70	130	63	105		
80	109	31	80		
90	91	3	60		
100	74	2	46		
110	57	3	34		
120	44	4	25		
130	32	6	19		
140	23	6	15		
150	16	7	12		
160	12	8	10		
170	9	8	9		
180	8	8	8		