



日立照明器具 照明特性

名称: 直管形LEDランプ [°]	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: LDK20SS-D/10/12NA	室指数	照明率 S/H=1.0														
＜備考＞ FL20形 定格出力(H) タイプ [°] (昼光色)	0.6	0.52	0.39	0.31	0.49	0.38	0.30	0.25	0.35	0.29	0.24	0.32	0.27	0.23	0.19	
	0.8	0.60	0.48	0.40	0.58	0.46	0.39	0.33	0.43	0.36	0.31	0.40	0.34	0.30	0.25	
姿図 	1	0.66	0.55	0.47	0.63	0.53	0.45	0.39	0.49	0.42	0.37	0.45	0.39	0.35	0.30	
	1.25	0.72	0.61	0.53	0.69	0.59	0.52	0.46	0.54	0.48	0.43	0.50	0.45	0.40	0.35	
	1.5	0.76	0.66	0.59	0.73	0.64	0.57	0.51	0.59	0.53	0.48	0.54	0.49	0.45	0.39	
	2	0.82	0.73	0.66	0.78	0.71	0.64	0.59	0.65	0.60	0.55	0.60	0.56	0.52	0.45	
	2.5	0.85	0.78	0.72	0.82	0.75	0.69	0.64	0.69	0.64	0.60	0.64	0.60	0.56	0.49	
	3	0.88	0.81	0.75	0.84	0.78	0.73	0.68	0.72	0.68	0.64	0.66	0.63	0.60	0.52	
	4	0.91	0.86	0.81	0.88	0.82	0.78	0.74	0.76	0.72	0.69	0.70	0.67	0.64	0.57	
光源	5	0.93	0.89	0.84	0.90	0.85	0.82	0.78	0.79	0.76	0.73	0.73	0.70	0.68	0.60	
品名 直管形LEDランプ [°]	7	0.96	0.93	0.89	0.93	0.89	0.86	0.83	0.83	0.80	0.78	0.77	0.75	0.73	0.64	
形式 LDK20SS-D/10/12NA	10	0.98	0.96	0.93	0.95	0.92	0.90	0.88	0.86	0.84	0.82	0.80	0.78	0.77	0.68	
光束 1,260 lm																

器具効率 Ft=	
上方光束 Fu=	
下方光束 Fd=	
最大取付間隔	
A-A	1.40 H
B-B	1.24 H
保守率	良 中 否

単体照度分布(初期値)

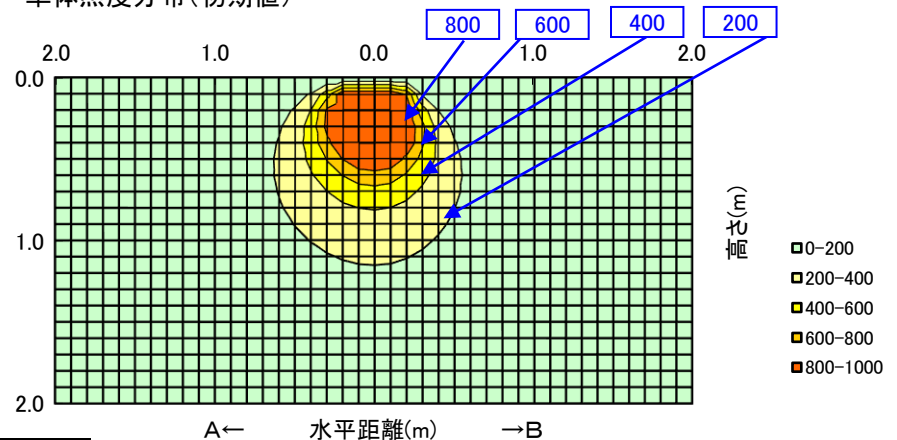

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	210	210	210		
10	209	206	207		
20	203	192	197		
30	195	173	183		
40	184	149	166		
50	168	116	144		
60	151	81	122		
70	135	51	102		
80	116	17	82		
90	99	1	68		
100	89	2	53		
110	69	4	41		
120	56	6	35		
130	45	9	29		
140	35	11	24		
150	28	13	21		
160	22	16	19		
170	18	17	18		
180	17	17	17		

配光曲線
(cd/1000 lm)

