



日立照明器具 照明特性

名称: 直管形LEDランプ	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: LDK40SS-D/22/34NE	室指数	照明率 S/H=1.0														
<備考> FHF32形 高出力(H)タイプ (昼光色)	0.6	0.54	0.41	0.33	0.52	0.40	0.33	0.28	0.38	0.31	0.27	0.36	0.30	0.26	0.23	
	0.8	0.63	0.51	0.43	0.60	0.49	0.42	0.36	0.46	0.40	0.35	0.44	0.38	0.33	0.30	
姿図 	1	0.69	0.57	0.49	0.66	0.56	0.48	0.42	0.52	0.46	0.41	0.49	0.44	0.39	0.35	
	1.25	0.74	0.64	0.56	0.72	0.62	0.55	0.49	0.58	0.52	0.47	0.55	0.49	0.45	0.41	
	1.5	0.79	0.69	0.62	0.76	0.67	0.60	0.54	0.63	0.57	0.52	0.59	0.54	0.50	0.45	
	2	0.84	0.76	0.69	0.81	0.74	0.67	0.62	0.69	0.64	0.60	0.65	0.61	0.57	0.52	
	2.5	0.88	0.80	0.74	0.85	0.78	0.72	0.68	0.73	0.69	0.65	0.69	0.65	0.62	0.56	
	3	0.90	0.84	0.78	0.87	0.81	0.76	0.71	0.76	0.72	0.68	0.72	0.68	0.65	0.59	
	4	0.93	0.88	0.83	0.90	0.86	0.81	0.77	0.81	0.77	0.74	0.76	0.73	0.70	0.64	
光源	5	0.96	0.91	0.87	0.93	0.88	0.85	0.81	0.83	0.80	0.77	0.79	0.76	0.74	0.67	
品名 直管形LEDランプ	7	0.98	0.95	0.92	0.95	0.92	0.89	0.87	0.87	0.85	0.82	0.82	0.80	0.78	0.72	
形式 LDK40SS-D/22/34NE	10	1.00	0.98	0.96	0.98	0.95	0.93	0.91	0.90	0.88	0.87	0.85	0.84	0.82	0.76	
光束 3,490 lm																

器具効率 Ft=	
上方光束 Fu=	
下方光束 Fd=	
最大取付間隔	
A-A	1.34 H
B-B	1.24 H
保守率	良 中 否

単体照度分布(初期値)

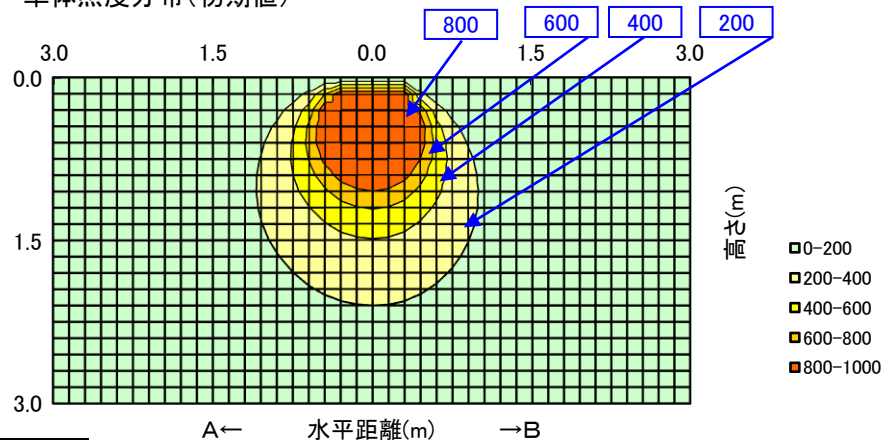

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	253	253	253		
10	249	249	249		
20	239	233	235		
30	223	209	216		
40	205	177	190		
50	180	139	159		
60	155	101	130		
70	130	60	102		
80	105	20	75		
90	84		57		
100	67	1	41		
110	51	2	29		
120	38	3	21		
130	28	4	16		
140	20	5	13		
150	15	7	11		
160	11	8	9		
170	9	8	9		
180	9	9	9		

配光曲線
(cd/1000 lm)

