
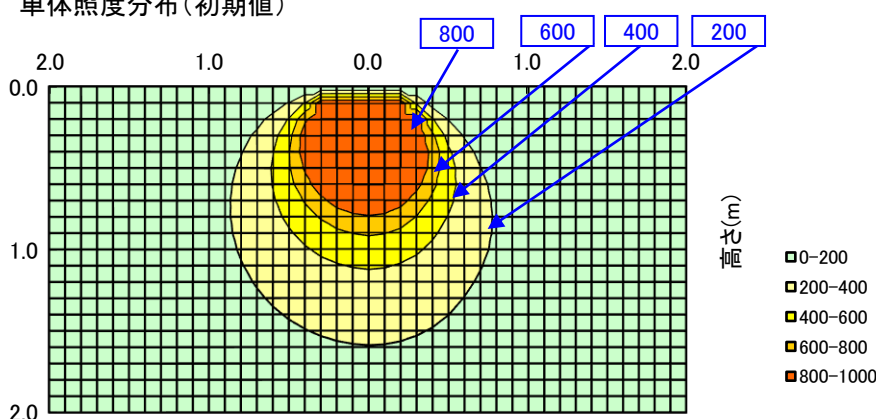
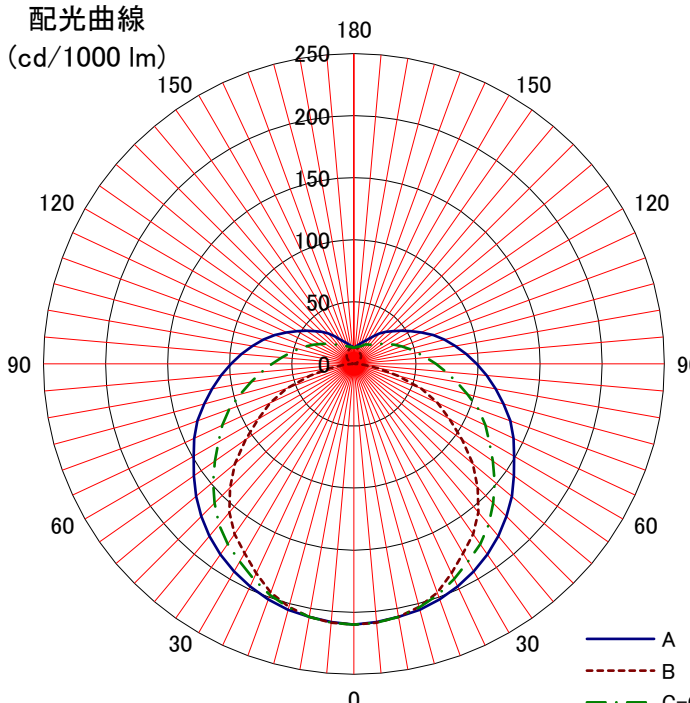


日立照明器具 照明特性

名称: 直管形LEDランプ	天井 反射率 壁 床	80%			70%				50%			30%			0%
		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		10%													0%
形式: LDK40SS・N/15/24NE	室指数	照明率 S/H=1.0													
<備考> FLR40形 定格出力タイプ (昼白色)	0.6	0.52	0.39	0.31	0.49	0.38	0.30	0.25	0.35	0.29	0.24	0.33	0.27	0.23	0.19
	0.8	0.60	0.48	0.40	0.58	0.46	0.39	0.33	0.43	0.36	0.31	0.40	0.34	0.30	0.26
姿図 	1	0.66	0.55	0.46	0.63	0.53	0.45	0.39	0.49	0.42	0.37	0.45	0.39	0.35	0.30
	1.25	0.72	0.61	0.53	0.69	0.59	0.51	0.46	0.55	0.48	0.43	0.50	0.45	0.41	0.35
	1.5	0.76	0.66	0.59	0.73	0.64	0.57	0.51	0.59	0.53	0.48	0.55	0.50	0.45	0.40
	2	0.82	0.73	0.66	0.78	0.71	0.64	0.59	0.65	0.60	0.55	0.60	0.56	0.52	0.46
	2.5	0.86	0.78	0.72	0.82	0.75	0.69	0.64	0.70	0.65	0.60	0.64	0.60	0.57	0.50
	3	0.88	0.81	0.75	0.84	0.78	0.73	0.68	0.73	0.68	0.64	0.67	0.63	0.60	0.53
	4	0.91	0.86	0.81	0.88	0.83	0.78	0.74	0.77	0.73	0.70	0.71	0.68	0.65	0.58
光源	5	0.94	0.89	0.85	0.90	0.86	0.82	0.78	0.80	0.76	0.73	0.74	0.71	0.69	0.61
品名 直管形LEDランプ	形式 LDK40SS・N/15/24NE	7	0.96	0.93	0.89	0.93	0.90	0.87	0.84	0.83	0.81	0.78	0.77	0.75	0.73
光束 2,400 lm	10	0.99	0.96	0.94	0.95	0.93	0.90	0.88	0.86	0.85	0.83	0.80	0.79	0.78	0.69
器具効率 Ft=		単体照度分布(初期値) 													
上方光束 Fu=															
下方光束 Fd=															
最大取付間隔		配光曲線 (cd/1000 lm) 													
A-A 1.38 H															
B-B 1.26 H															
保守率	良 中 否														
光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0									
0	210	210	210												
10	207	207	207												
20	202	196	198												
30	193	176	184												
40	181	156	169												
50	166	125	148												
60	149	89	126												
70	134	58	107												
80	116	20	84												
90	99	1	66												
100	83	1	52												
110	68	3	41												
120	53	4	32												
130	41	7	25												
140	32	9	20												
150	23	10	18												
160	18	12	15												
170	15	13	14												
180	13	13	13												