



日立照明器具 照明特性

名称:直管形LEDランプ	天井	80%			70%				50%			30%			0%		
		壁	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
形式:LDK40SS・N/18/24E	床	10%															0%
		照明率 S/H=1.0															
<備考>FLR40形 定格出力タイプ	0.6	0.52	0.39	0.31	0.49	0.38	0.30	0.25	0.35	0.29	0.24	0.33	0.27	0.23	0.19		
	0.8	0.60	0.48	0.40	0.58	0.46	0.39	0.33	0.43	0.36	0.31	0.40	0.34	0.30	0.26		
姿図 	1	0.66	0.55	0.46	0.63	0.53	0.45	0.39	0.49	0.42	0.37	0.45	0.39	0.35	0.30		
	1.25	0.72	0.61	0.53	0.69	0.59	0.51	0.46	0.55	0.48	0.43	0.50	0.45	0.41	0.35		
	1.5	0.76	0.66	0.59	0.73	0.64	0.57	0.51	0.59	0.53	0.48	0.55	0.50	0.45	0.40		
	2	0.82	0.73	0.66	0.78	0.71	0.64	0.59	0.65	0.60	0.55	0.60	0.56	0.52	0.46		
	2.5	0.86	0.78	0.72	0.82	0.75	0.69	0.64	0.70	0.65	0.60	0.64	0.60	0.57	0.50		
	3	0.88	0.81	0.75	0.84	0.78	0.73	0.68	0.73	0.68	0.64	0.67	0.63	0.60	0.53		
	4	0.91	0.86	0.81	0.88	0.83	0.78	0.74	0.77	0.73	0.70	0.71	0.68	0.65	0.58		
光源	5	0.94	0.89	0.85	0.90	0.86	0.82	0.78	0.80	0.76	0.73	0.74	0.71	0.69	0.61		
品名:直管形LEDランプ	7	0.96	0.93	0.89	0.93	0.90	0.87	0.84	0.83	0.81	0.78	0.77	0.75	0.73	0.66		
形式:LDK40SS・N/18/24E	10	0.99	0.96	0.94	0.95	0.93	0.90	0.88	0.86	0.85	0.83	0.80	0.79	0.78	0.69		
光束:2,400 lm																	

器具効率 Ft:					
上方光束 Fu:					
下方光束 Fd:					
最大取付間隔					
A-A			H		
B-B			H		
保守率	良				
	中				
否					
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	210	210	210		
10	207	207	207		
20	202	196	198		
30	193	176	184		
40	181	156	169		
50	166	125	148		
60	149	89	126		
70	134	58	107		
80	116	20	84		
90	99	1	66		
100	83	1	52		
110	68	3	41		
120	53	4	32		
130	41	7	25		
140	32	9	20		
150	23	10	18		
160	18	12	15		
170	15	13	14		
180	13	13	13		

単体照度分布 (初期値)

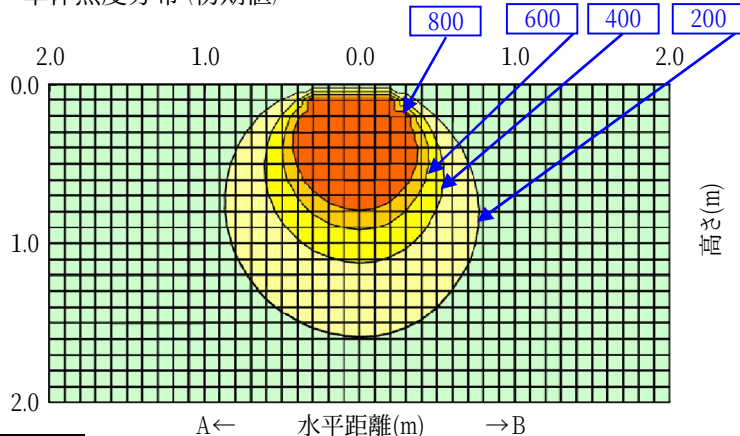

800 600 400 200

2.0 1.0 0.0 1.0 2.0


0.0 1.0 2.0

高さ(m)

0-200
200-400
400-600
600-800
800-1000

A← 水平距離(m) →B

配光曲線
(cd/1000 lm)

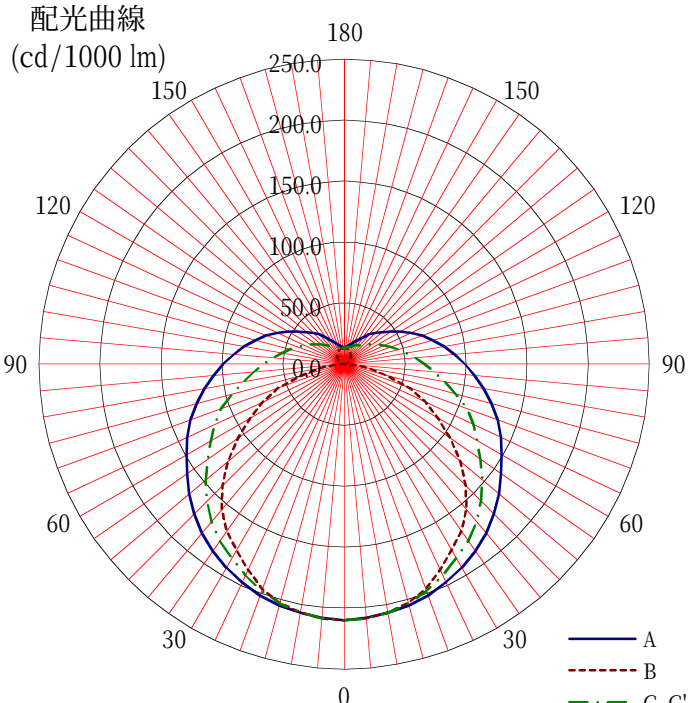

180 150 120 90 60 30 0

250.0 200.0 150.0 100.0 50.0 0.0

A
B
C-C'