

日立照明器具 照明特性

名称:直管形LEDランプ	反射率	天井	80%			70%			50%			30%					
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	0%			
	床	10%			0%			0%			0%			0%			
形式:LDK40SS-N/31/39E	室指数		照明率 S/H=1.0														
	<備考> FHF32形 高出力(H) タイプ		0.6	0.54	0.41	0.33	0.52	0.40	0.33	0.28	0.38	0.31	0.27	0.36	0.30	0.26	0.23
		0.8	0.63	0.51	0.43	0.60	0.49	0.42	0.36	0.46	0.40	0.35	0.44	0.38	0.33	0.30	
姿図		1	0.69	0.57	0.49	0.66	0.56	0.48	0.42	0.52	0.46	0.41	0.49	0.44	0.39	0.35	
		1.25	0.74	0.64	0.56	0.72	0.62	0.55	0.49	0.58	0.52	0.47	0.55	0.49	0.45	0.41	
		1.5	0.79	0.69	0.62	0.76	0.67	0.60	0.54	0.63	0.57	0.52	0.59	0.54	0.50	0.45	
		2	0.84	0.76	0.69	0.81	0.74	0.67	0.62	0.69	0.64	0.60	0.65	0.61	0.57	0.52	
		2.5	0.88	0.80	0.74	0.85	0.78	0.72	0.68	0.73	0.69	0.65	0.69	0.65	0.62	0.56	
		3	0.90	0.84	0.78	0.87	0.81	0.76	0.71	0.76	0.72	0.68	0.72	0.68	0.65	0.59	
光源		4	0.93	0.88	0.83	0.90	0.86	0.81	0.77	0.81	0.77	0.74	0.76	0.73	0.70	0.64	
品名	直管形LEDランプ		5	0.96	0.91	0.87	0.93	0.88	0.85	0.81	0.83	0.80	0.77	0.79	0.76	0.74	0.67
形式	LDK40SS-N/31/39E		7	0.98	0.95	0.92	0.95	0.92	0.89	0.87	0.87	0.85	0.82	0.82	0.80	0.78	0.72
光束	3,950 lm		10	1.00	0.98	0.96	0.98	0.95	0.93	0.91	0.90	0.88	0.87	0.85	0.84	0.82	0.76

器具效率 $F_t =$

上方光束 $F_u =$

下方光束 $F_d =$

最大取付間隔

A-A

B-B


保良

守中

是 否

光度 (d)

单体照度分布(初期值)

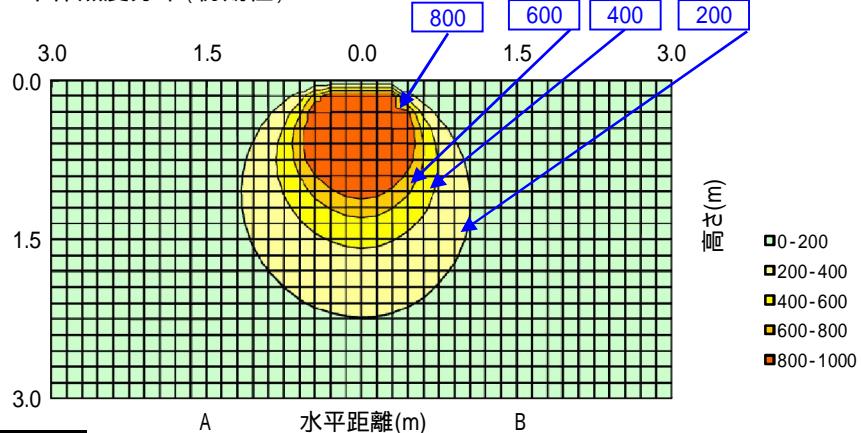

光度 (Cd/1000 m)

	A-0	B-B	C-0	A'-0	C'-0
0	253	253	253		
10	249	249	249		
20	239	233	235		
30	223	209	216		
40	205	177	190		
50	180	139	159		
60	155	101	130		
70	130	60	102		
80	105	20	75		
90	84		57		
100	67	1	41		
110	51	2	29		
120	38	3	21		
130	28	4	16		
140	20	5	13		
150	15	7	11		
160	11	8	9		
170	9	8	9		
180	9	9	9		

