

日立照明器具 照明特性

形式：LDS6612		反 射 率	天井	80%			70%				50%			30%			0%		
姿図 			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
光源		0.6	0.29	0.26	0.24	0.29	0.26	0.24	0.23	0.26	0.24	0.23	0.25	0.24	0.23	0.22			
		0.8	0.32	0.29	0.27	0.31	0.29	0.27	0.26	0.28	0.27	0.26	0.28	0.27	0.26	0.25			
		1	0.33	0.31	0.29	0.33	0.31	0.29	0.28	0.30	0.29	0.28	0.30	0.28	0.27	0.27			
		1.25	0.35	0.33	0.31	0.34	0.32	0.31	0.30	0.32	0.30	0.29	0.31	0.30	0.29	0.29			
		1.5	0.36	0.34	0.32	0.35	0.34	0.32	0.31	0.33	0.32	0.31	0.33	0.31	0.31	0.30			
品名 ミニクリプトン電球		2	0.37	0.36	0.34	0.37	0.35	0.34	0.33	0.35	0.34	0.33	0.34	0.33	0.32	0.32			
		2.5	0.38	0.37	0.35	0.38	0.36	0.35	0.34	0.36	0.35	0.34	0.35	0.34	0.33	0.33			
		3	0.38	0.37	0.36	0.38	0.37	0.36	0.35	0.36	0.35	0.35	0.35	0.35	0.34	0.33			
		4	0.39	0.38	0.37	0.39	0.38	0.37	0.36	0.37	0.36	0.36	0.36	0.36	0.35	0.34			
		5	0.40	0.39	0.38	0.39	0.38	0.38	0.37	0.38	0.37	0.37	0.37	0.37	0.36	0.36	0.35		
形式 KR100/110V54W		7	0.40	0.40	0.39	0.40	0.39	0.39	0.38	0.38	0.38	0.38	0.38	0.37	0.37	0.36			
		10	0.41	0.40	0.40	0.40	0.40	0.39	0.39	0.39	0.39	0.38	0.38	0.38	0.38	0.37			
光束 760 lm																			

器具効率 $F_t = 38.0\%$

上方光束 $F_u = 0.0\%$

下方光束 $F_d = 38.0\%$

配光分類

BZ-

最大取付間隔

A-A 0.66 H


B-B H

保守率	良	0.81
	中	0.77
	否	0.67

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	472		
10	400		
20	245		
30	133		
40	76		
50	46		
60	21		
70	11		
80	6		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

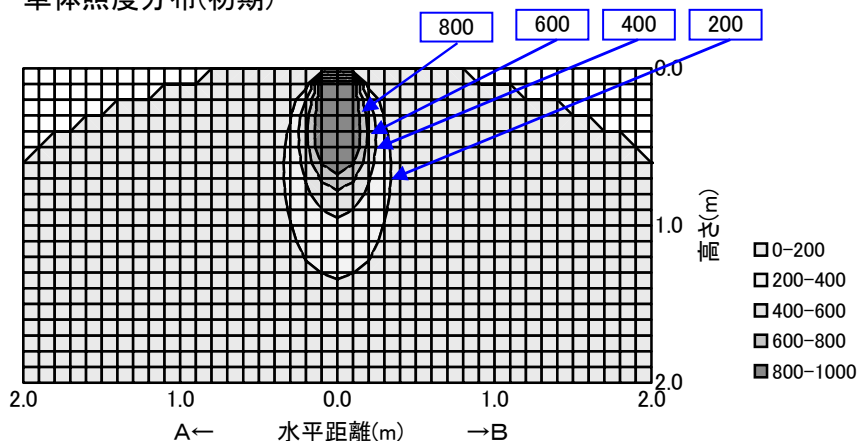

配光曲線

