


日立照明器具 照明特性

形式：LDS6613		反 射 率	天井	80%			70%				50%			30%			0%		
傾斜天井用(15～20°) <16° 傾斜時の配光>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.24	0.20	0.17	0.24	0.20	0.17	0.15	0.19	0.17	0.15	0.19	0.17	0.15	0.15			
		0.8	0.28	0.24	0.21	0.27	0.24	0.21	0.19	0.23	0.21	0.19	0.23	0.21	0.19	0.18			
		1	0.30	0.27	0.24	0.30	0.26	0.24	0.22	0.26	0.24	0.22	0.25	0.23	0.22	0.21			
		1.25	0.32	0.29	0.27	0.32	0.29	0.27	0.25	0.28	0.26	0.25	0.28	0.26	0.25	0.24			
		1.5	0.34	0.31	0.29	0.33	0.31	0.29	0.27	0.30	0.28	0.27	0.30	0.28	0.27	0.26			
		2	0.36	0.34	0.32	0.35	0.33	0.32	0.30	0.33	0.31	0.30	0.32	0.31	0.29	0.29			
		2.5	0.37	0.35	0.33	0.37	0.35	0.33	0.32	0.34	0.33	0.31	0.33	0.32	0.31	0.30			
		3	0.38	0.36	0.35	0.37	0.36	0.34	0.33	0.35	0.34	0.33	0.34	0.33	0.32	0.31			
光源		4	0.39	0.37	0.36	0.38	0.37	0.36	0.35	0.36	0.35	0.34	0.35	0.35	0.34	0.33			
品名	ミニクリプトン電球	5	0.39	0.38	0.37	0.39	0.38	0.37	0.36	0.37	0.36	0.36	0.36	0.36	0.35	0.34			
形式	KR100/110V54W	7	0.40	0.39	0.39	0.40	0.39	0.38	0.38	0.38	0.38	0.37	0.37	0.37	0.36	0.35			
光束	760 lm	10	0.41	0.40	0.40	0.40	0.40	0.39	0.39	0.39	0.39	0.38	0.38	0.38	0.38	0.37			

器具効率 Ft= 38.5%

上方光束 Fu= 0.0%

下方光束 Fd= 38.5%

配光分類

BZ-

最大取付間隔

A-A 1.14 H


B-B H

保守率	良	0.81
	中	0.77
	否	0.67

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	170		
10	169		
20	161		
30	128		
40	108		
50	84		
60	49		
70	18		
80	7		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

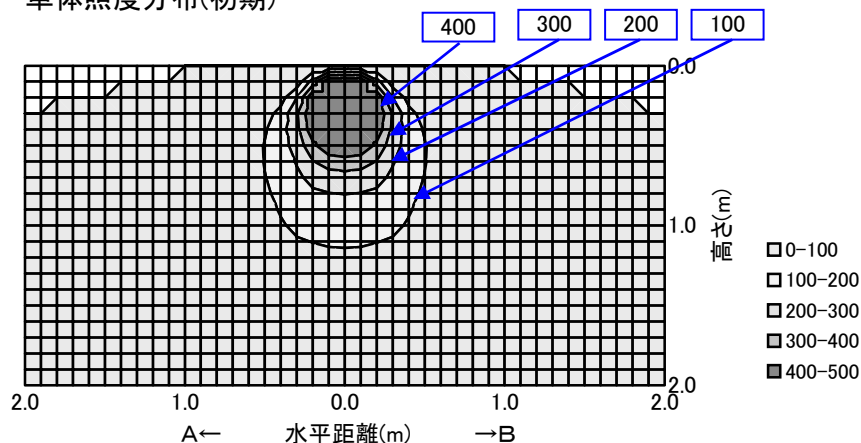

配光曲線

