
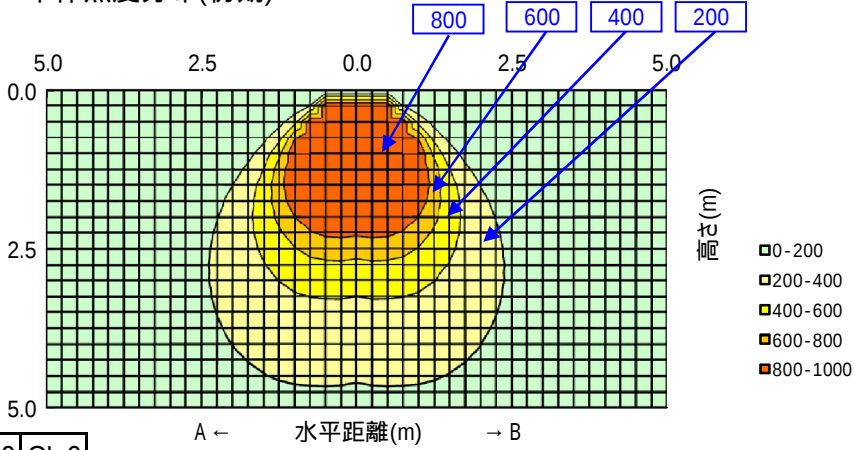


日立照明器具 照明特性

形式: S250傘あり		天井	80%				70%				50%				30%				0%
LME1101MN (BK10CLN14A) +MK4011		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
		室指数	照明率 S/H=1.0																
		0.6	0.63	0.52	0.45	0.62	0.51	0.45	0.40	0.50	0.44	0.40	0.49	0.44	0.40	0.38			
		0.8	0.73	0.63	0.56	0.72	0.62	0.56	0.51	0.61	0.55	0.51	0.60	0.55	0.51	0.49			
		1	0.79	0.70	0.64	0.78	0.70	0.63	0.59	0.68	0.63	0.58	0.67	0.62	0.58	0.56			
		1.25	0.85	0.77	0.71	0.84	0.76	0.70	0.66	0.75	0.70	0.65	0.73	0.69	0.65	0.63			
		1.5	0.89	0.82	0.77	0.88	0.81	0.76	0.72	0.79	0.75	0.71	0.78	0.74	0.71	0.68			
		2	0.94	0.88	0.84	0.93	0.87	0.83	0.79	0.86	0.82	0.79	0.84	0.81	0.78	0.76			
		2.5	0.97	0.92	0.88	0.96	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.80			
		3	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.91	0.89	0.86	0.90	0.87	0.85	0.82			
		4	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.93	0.91	0.89	0.86			
光源		5	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89			
品名		7	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.97	0.95	0.93			
形式		10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.96			
光束		11,600 lm																	

器具効率 Ft= 100.0%					
上方光束 Fu= 0.0%					
下方光束 Fd= 100.0%					
配光分類					
BZ-					
最大取付間隔					
A-A 1.44 H					
B-B H					
保守率	良	0.79			
	中	0.75			
	否	0.66			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	368				
10	392				
20	406				
30	377				
40	313				
50	217				
60	110				
70	45				
80	5				
90					
100					
110					
120					
130					
140					
150	1				
160	1				
170	3				
180					

配光曲線	
