



日立照明器具 照明特性

名称: 高天井用LEDランプ (E39口金タイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: LME1601MNC	室指数	固有照明率 S/H=1.0														
〈備考〉		0.6	0.61	0.49	0.42	0.59	0.49	0.42	0.37	0.48	0.41	0.37	0.47	0.41	0.37	0.35
姿図 		0.8	0.71	0.60	0.53	0.70	0.60	0.53	0.48	0.58	0.52	0.48	0.57	0.52	0.47	0.45
	1	0.78	0.68	0.61	0.76	0.67	0.61	0.56	0.66	0.60	0.55	0.64	0.59	0.55	0.53	
	1.25	0.83	0.75	0.68	0.82	0.74	0.68	0.63	0.72	0.67	0.63	0.71	0.66	0.62	0.60	
	1.5	0.88	0.80	0.74	0.86	0.79	0.74	0.69	0.77	0.73	0.69	0.76	0.72	0.68	0.66	
	2	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.77	0.82	0.79	0.76	0.74	
	2.5	0.96	0.91	0.86	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78	
	3	0.98	0.93	0.90	0.97	0.92	0.89	0.86	0.90	0.87	0.84	0.88	0.86	0.83	0.81	
光源形式	4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
-	5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88	
器具光束	7	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
17,400 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.01	1.02	1.01	1.00	0.99	0.99	0.98	0.95	


器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A		1.44 H			
B-B		H			
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	357				
10	359				
20	360				
30	346				
40	306				
50	224				
60	138				
70	58				
80	5				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

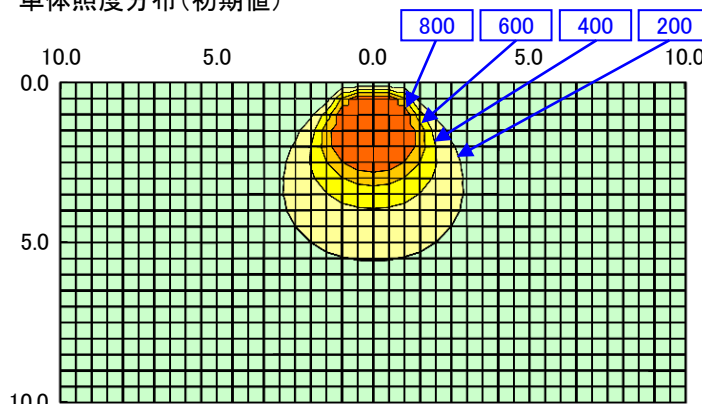

A ← 水平距離(m) → B

配光曲線
(cd/1000 lm)

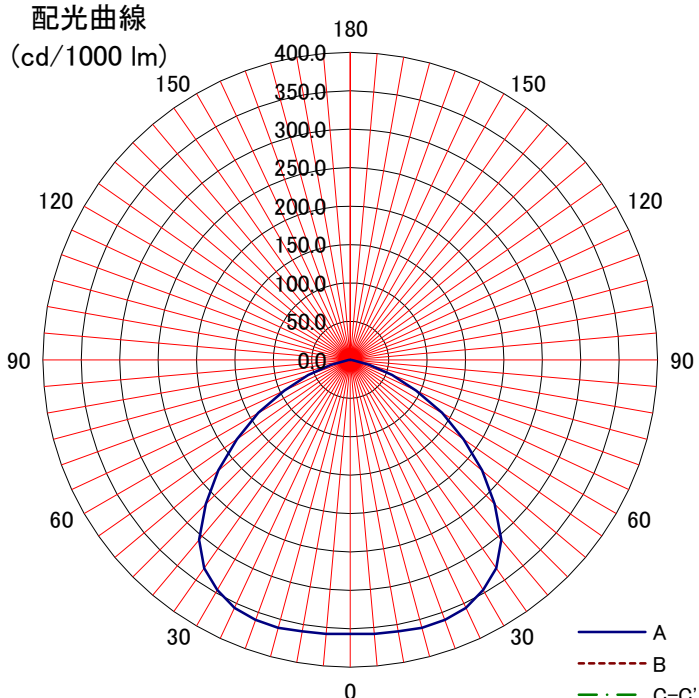

A
B
C-C'