
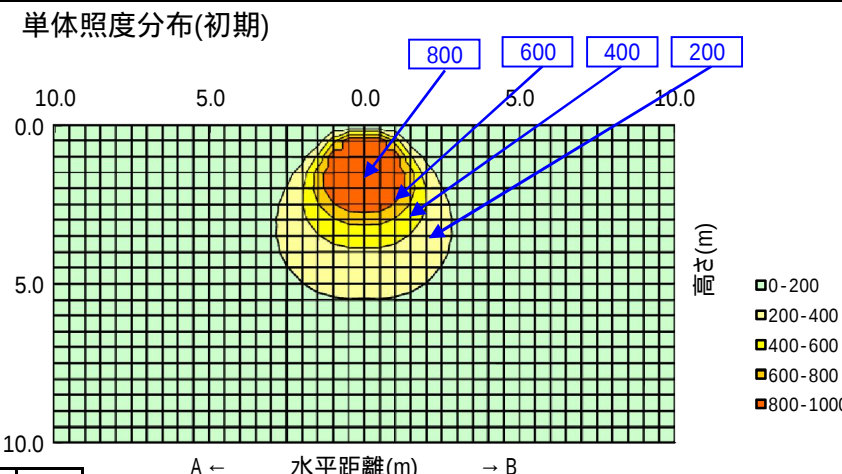
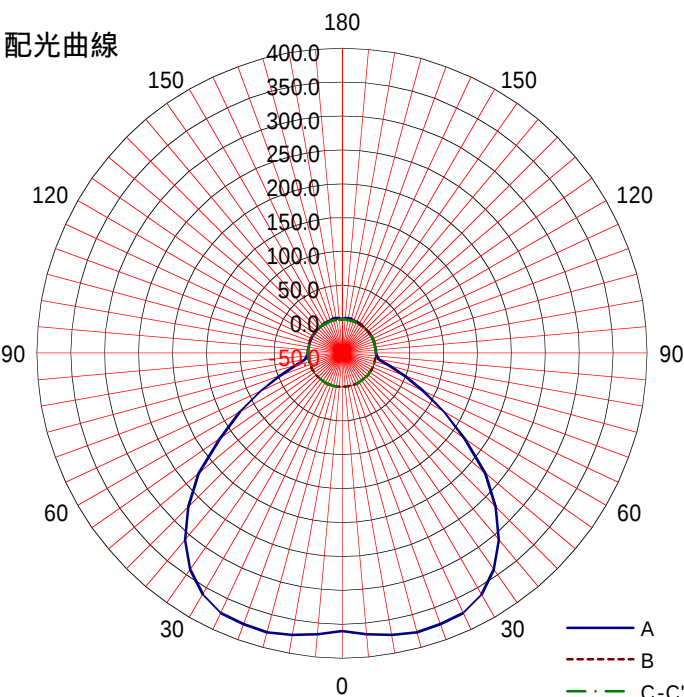


日立照明器具 照明特性

形式: S400傘あり		天井	80%			70%			50%			30%			0%	
LME1601MN (BK14CLN14A) +MK4011	反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
	室指数	照明率 S/H=1.0														
	姿図	0.6	0.62	0.50	0.43	0.60	0.50	0.43	0.38	0.49	0.43	0.38	0.48	0.42	0.38	0.36
	0.8	0.72	0.61	0.54	0.70	0.61	0.54	0.49	0.60	0.54	0.49	0.58	0.53	0.49	0.47	
	1	0.78	0.69	0.62	0.77	0.68	0.62	0.57	0.67	0.61	0.57	0.65	0.60	0.56	0.54	
	1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.64	0.73	0.68	0.64	0.72	0.67	0.63	0.61	
	1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.67	
	2	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.80	0.77	0.74	
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.84	0.81	0.79	
	3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82	
	4	1.01	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.86	
	5	1.02	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.93	0.94	0.93	0.91	0.88	
品名	形式	7	1.05	1.03	1.01	1.03	1.02	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.92
光束	16,800 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.95

器具効率 Ft= 100.0%																	
上方光束 Fu= 0.0%																	
下方光束 Fd= 100.0%																	
配光分類																	
BZ-																	
最大取付間隔																	
A-A 1.44 H																	
B-B H																	
保守率	良	0.79															
	中	0.75															
	否	0.66															
光度 (cd/1000 lm)																	
A-0																	
B-B																	
C-0																	
A'-0																	
C'-0																	
0		360															
10		372															
20		376															
30		361															
40		310															
50		226															
60		123															
70		49															
80		6															
90																	
100																	
110																	
120																	
130																	
140																	
150		1															
160		1															
170		3															
180																	