


日立照明器具 照明特性

形式: LME1601MN (BK14CLN14A)		天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
姿図 		0.6	0.62	0.51	0.43	0.61	0.50	0.43	0.38	0.49	0.43	0.38	0.48	0.42	0.38	0.36	
		0.8	0.72	0.62	0.55	0.71	0.61	0.54	0.49	0.60	0.54	0.49	0.58	0.53	0.49	0.47	
		1	0.79	0.69	0.62	0.77	0.68	0.62	0.57	0.67	0.61	0.57	0.65	0.60	0.56	0.54	
		1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.65	0.73	0.68	0.64	0.72	0.67	0.64	0.61	
		1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.71	0.78	0.74	0.70	0.77	0.73	0.69	0.67	
		2	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.78	0.83	0.80	0.77	0.74	
		2.5	0.97	0.92	0.87	0.95	0.90	0.87	0.83	0.88	0.85	0.82	0.87	0.84	0.81	0.79	
		3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82	
光源		4	1.01	0.97	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.90	0.92	0.90	0.88	0.86	
		5	1.03	1.00	0.97	1.01	0.99	0.96	0.94	0.97	0.95	0.93	0.94	0.93	0.91	0.88	
品名		7	1.05	1.03	1.01	1.03	1.02	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.92	
形式		10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.95	
光束	16,800 lm																


器具効率 Ft= 100.0%					
上方光束 Fu= 0.0%					
下方光束 Fd= 100.0%					
配光分類					
BZ-					
最大取付間隔					
A-A 1.44 H					
B-B H					
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	362				
10	374				
20	378				
30	363				
40	309				
50	224				
60	123				
70	49				
80	6				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

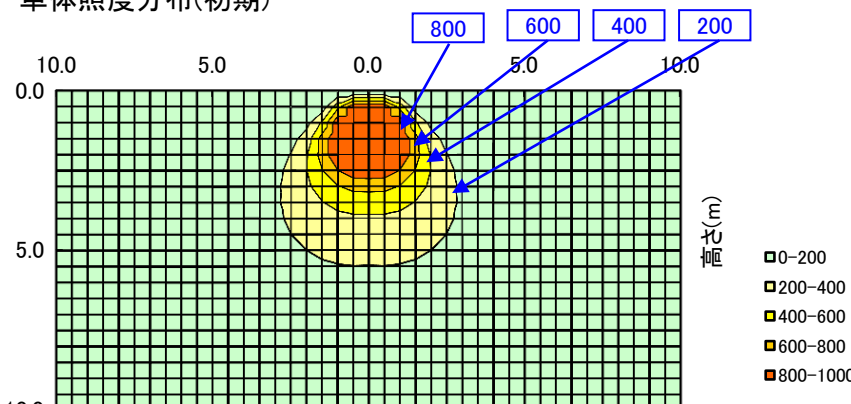

10.05.00.05.010.0
0.0
5.0
10.0
A← 水平距離(m) →B
(m) 縦
■0-200
■200-400
■400-600
■600-800
■800-1000

配光曲線

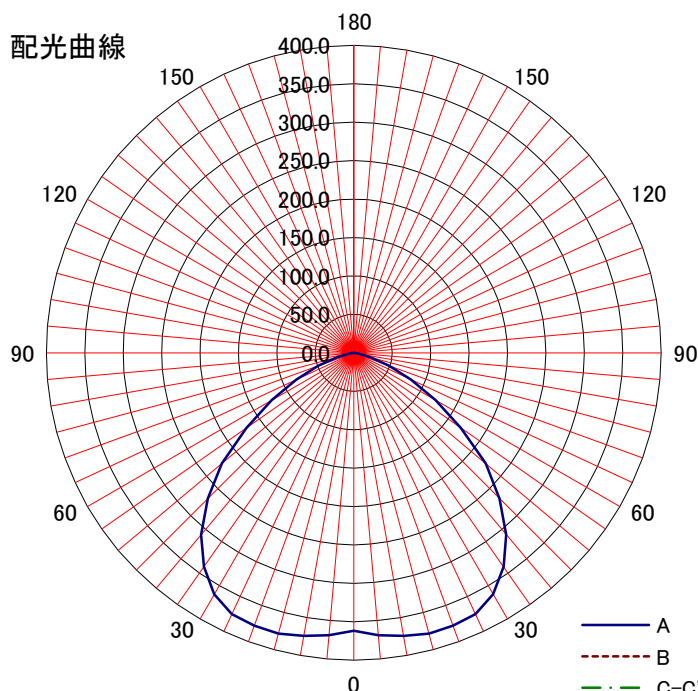

180
150
120
90
60
30
0
400.0
350.0
300.0
250.0
200.0
150.0
100.0
50.0
0.0
A
B
C-C'