
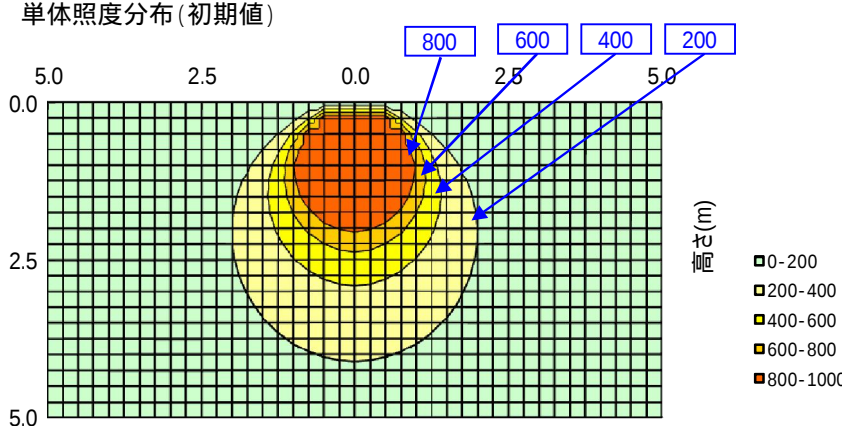
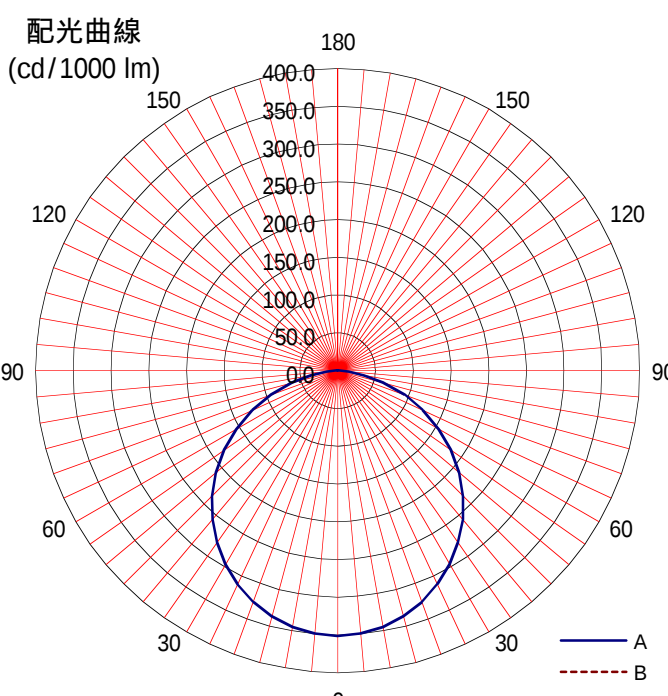


日立照明器具 照明特性

名称: 高天井用LEDラン (E39口金タイプ)	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: LMEP1101MN	室指数	固有照明率 S/H=1.0														
<備考> 拡散カバー	0.6	0.58	0.46	0.39	0.57	0.46	0.39	0.33	0.45	0.38	0.33	0.44	0.38	0.33	0.31	
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.43	0.55	0.48	0.43	0.53	0.47	0.43	0.41	
姿図 	1	0.75	0.64	0.56	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.54	0.50	0.48	
	1.25	0.80	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.57	0.66	0.61	0.57	0.55	
	1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.73	0.68	0.63	0.72	0.67	0.63	0.60	
	2	0.90	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.71	0.78	0.74	0.71	0.68	
	2.5	0.94	0.88	0.82	0.92	0.87	0.82	0.78	0.84	0.80	0.77	0.82	0.79	0.76	0.73	
	3	0.96	0.91	0.86	0.94	0.90	0.85	0.81	0.87	0.84	0.80	0.85	0.82	0.79	0.77	
光源形式	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82	
-	5	1.01	0.97	0.94	1.00	0.96	0.93	0.91	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
器具光束	7	1.03	1.01	0.98	1.02	1.00	0.97	0.95	0.97	0.96	0.94	0.95	0.94	0.92	0.89	
9,600 lm	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	
器具効率 Ft= 100%		単体照度分布 (初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.26 H																
B-B H																
保守率	良															0.81
	中															0.79
	否															0.75
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 														
	A-0	B-B	C-0	A'-0	C'-0											
0	352															
10	345															
20	326															
30	297															
40	258															
50	211															
60	155															
70	94															
80	36															
90	2															
100																
110																
120																
130																
140																
150																
160																
170																
180																