



日立照明器具 照明特性

名称: 高天井用LEDラング (E39口金タイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: LMEP1601MN	室指数	固有照明率 S/H=1.0														
<備考> 拡散カバー	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.44	0.38	0.33	0.31	
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.44	0.55	0.48	0.43	0.54	0.48	0.43	0.41	
姿図 	1	0.75	0.64	0.57	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.55	0.50	0.48	
	1.25	0.81	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.62	0.57	0.55	
	1.5	0.85	0.76	0.70	0.83	0.76	0.69	0.64	0.74	0.68	0.64	0.72	0.67	0.63	0.61	
	2	0.91	0.84	0.78	0.89	0.83	0.77	0.73	0.81	0.76	0.72	0.79	0.75	0.71	0.69	
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74	
	3	0.96	0.91	0.86	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.82	0.80	0.77	
	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82	
光源形式 -	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
器具光束	7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.93	0.90	
13,900 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93	

器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A		1.26 H			
B-B		H			
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	353				
10	347				
20	328				
30	298				
40	260				
50	210				
60	158				
70	94				
80	31				
90	1				
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

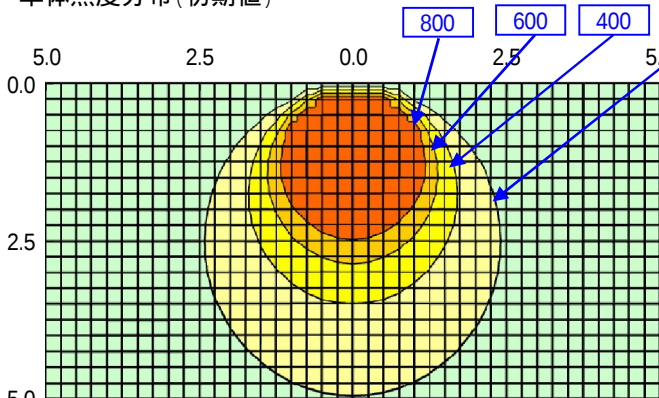

5.0 2.5 0.0 2.5 5.0


0.0 2.5 5.0

水平距離(m)

高さ(m)

- 0-200
- 200-400
- 400-600
- 600-800
- 800-1000

配光曲線
(cd/1000 lm)

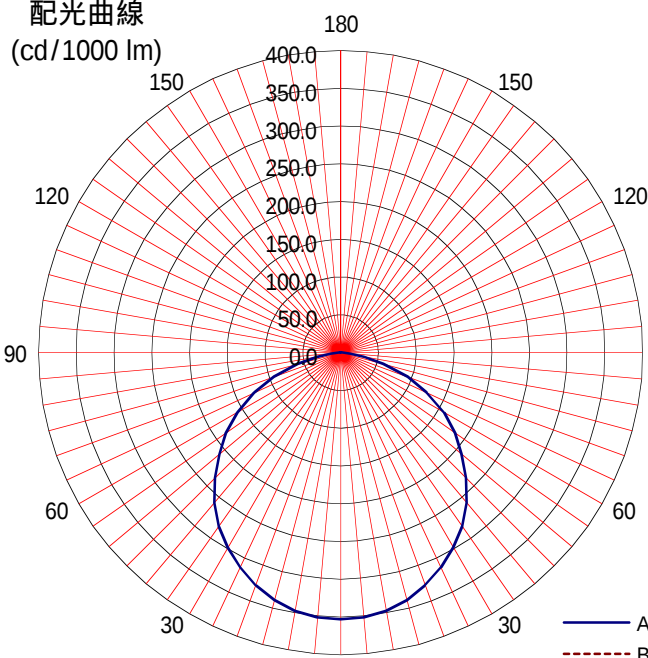

180 150 120 90 60 30 0

400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0

A
B
C-C'