
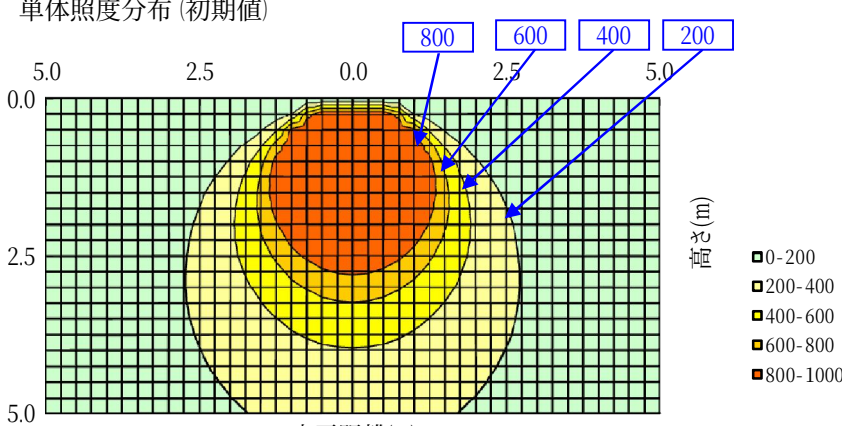
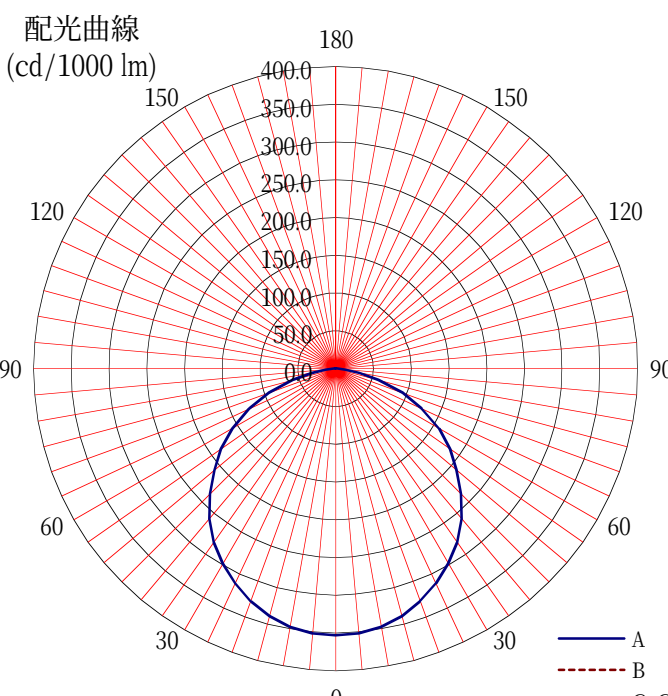


日立照明器具 照明特性

名称: 高天井用LEDランプ (E39口金タイプ)	反射率	天井	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: LMEP2101MN	室指数	壁	10%													0%
<備考> 拡散カバー		床	固有照明率 S/H=1.0													0%
姿図 	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.44	0.38	0.33	0.31	
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.44	0.55	0.48	0.43	0.54	0.48	0.43	0.41	
	1	0.75	0.64	0.57	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.55	0.50	0.48	
	1.25	0.81	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.62	0.57	0.55	
	1.5	0.85	0.76	0.70	0.83	0.76	0.69	0.64	0.74	0.68	0.64	0.72	0.67	0.63	0.61	
	2	0.91	0.84	0.78	0.89	0.83	0.77	0.73	0.81	0.76	0.72	0.79	0.75	0.71	0.69	
光源形式	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74	
	3	0.96	0.91	0.86	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.82	0.80	0.77	
器具光束	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82	
	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
17,800 lm	7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.93	0.90	
	10	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93	
器具効率 Ft= 100% 上方光束 Fu= 0% 下方光束 Fd= 100%			単体照度分布 (初期値) 													
最大取付間隔 A-A 1.26 H B-B H			配光曲線 (cd/1000 lm) 													
光度 (cd/1000 lm) A-0 353 B-B 347 C-0 328 A'-0 298 C'-0 260 50 210 60 158 70 94 80 31 90 1 100 110 120 130 140 150 160 170 180																