
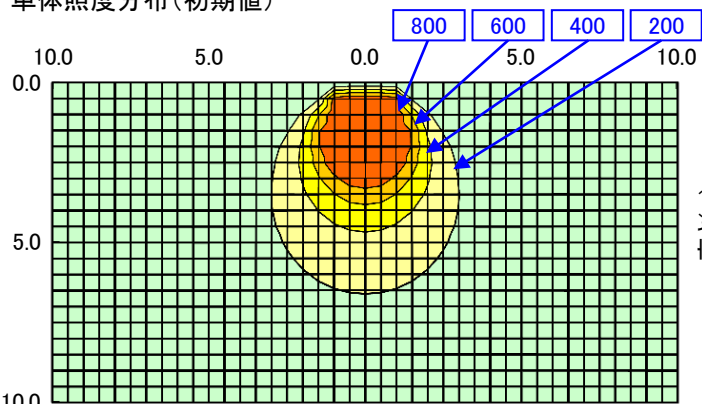
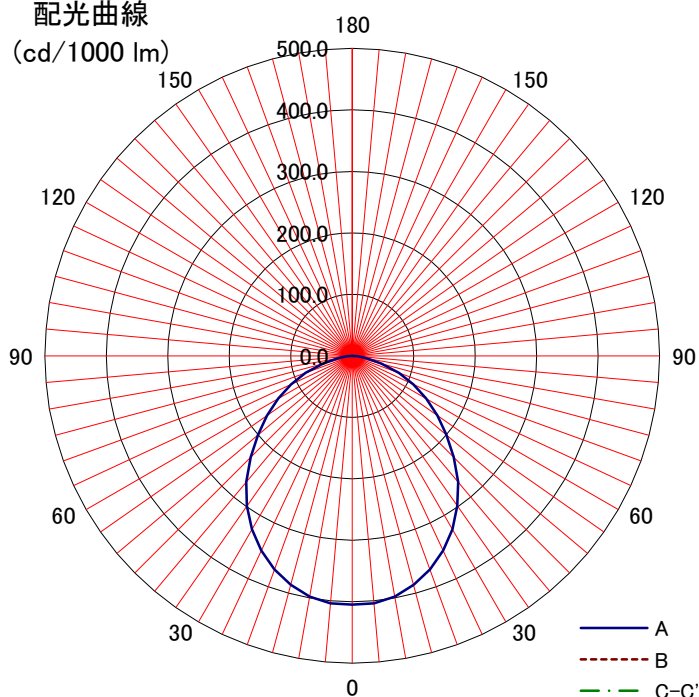


日立照明器具 照明特性

名称: 高天井用LEDランプ (E39口金タイプ)	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: LMEP2101MNC	室指数	固有照明率 S/H=1.0															
＜備考＞ 拡散パネル付		0.6	0.61	0.49	0.42	0.60	0.49	0.42	0.37	0.48	0.41	0.37	0.47	0.41	0.37	0.35	
姿図 		0.8	0.70	0.60	0.52	0.69	0.59	0.52	0.47	0.58	0.51	0.47	0.56	0.51	0.46	0.44	
	1	0.77	0.67	0.60	0.75	0.66	0.59	0.54	0.64	0.58	0.54	0.63	0.58	0.53	0.51		
	1.25	0.82	0.73	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.61	0.69	0.64	0.60	0.58		
	1.5	0.87	0.79	0.72	0.85	0.78	0.72	0.67	0.76	0.71	0.67	0.74	0.70	0.66	0.64		
	2	0.92	0.85	0.80	0.90	0.84	0.79	0.75	0.82	0.78	0.74	0.81	0.77	0.74	0.71		
	2.5	0.95	0.89	0.85	0.94	0.88	0.84	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76		
	3	0.97	0.92	0.88	0.96	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.81	0.79		
光源形式	4	1.00	0.96	0.92	0.98	0.95	0.92	0.89	0.93	0.90	0.87	0.91	0.88	0.86	0.83		
-	5	1.02	0.98	0.96	1.00	0.97	0.95	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87		
器具光束	7	1.04	1.02	1.00	1.03	1.00	0.99	0.97	0.98	0.97	0.95	0.96	0.95	0.93	0.91		
21,500 lm	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94		
器具効率 Ft= 100%		単体照度分布 (初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔		A← 水平距離(m) →B 															
A-A 1.20 H																	
B-B H																	
保守率	良	0.81	配光曲線 (cd/1000 lm) 														
	中	0.79															
	否	0.75															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	405																
10	398																
20	370																
30	326																
40	268																
50	200																
60	139																
70	81																
80	25																
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	