


日立照明器具 照明特性

形式: MD0709	反射率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													0%
			照明率 S/H=1.0													
姿図 	光源	0.6	0.54	0.48	0.43	0.54	0.47	0.43	0.40	0.47	0.43	0.40	0.46	0.43	0.40	0.39
		0.8	0.61	0.55	0.51	0.60	0.55	0.51	0.48	0.54	0.50	0.47	0.53	0.50	0.47	0.46
		1	0.65	0.60	0.56	0.64	0.59	0.55	0.53	0.58	0.55	0.52	0.57	0.54	0.52	0.51
		1.25	0.69	0.64	0.60	0.68	0.63	0.60	0.57	0.62	0.59	0.57	0.61	0.59	0.57	0.55
		1.5	0.71	0.67	0.64	0.70	0.66	0.63	0.61	0.65	0.63	0.60	0.64	0.62	0.60	0.59
		2	0.74	0.71	0.68	0.73	0.70	0.68	0.66	0.69	0.67	0.65	0.68	0.66	0.64	0.63
		2.5	0.76	0.73	0.71	0.75	0.72	0.70	0.68	0.71	0.69	0.67	0.70	0.68	0.67	0.65
		3	0.77	0.74	0.72	0.76	0.74	0.72	0.70	0.72	0.71	0.69	0.71	0.70	0.68	0.67
		4	0.78	0.76	0.75	0.77	0.76	0.74	0.73	0.74	0.73	0.72	0.73	0.72	0.71	0.69
		5	0.79	0.78	0.76	0.78	0.77	0.76	0.74	0.75	0.74	0.73	0.74	0.73	0.72	0.70
品名	メタセラム	7	0.81	0.80	0.79	0.80	0.79	0.78	0.77	0.77	0.76	0.76	0.76	0.75	0.74	0.72
形式	MT70FCE-WW-A	10	0.82	0.81	0.80	0.81	0.80	0.80	0.79	0.79	0.78	0.78	0.77	0.77	0.76	0.74
光束	5,800 lm															

器具効率 $F_t = 76.1\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 76.1\%$

配光分類
BZ-


最大取付間隔
 A-A 0.96 H
 B-B H

保守率
 良 0.66
 中 0.62
 否 0.55

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	514		
10	547		
20	481		
30	263		
40	208		
50	132		
60	65		
70	5		
80			
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

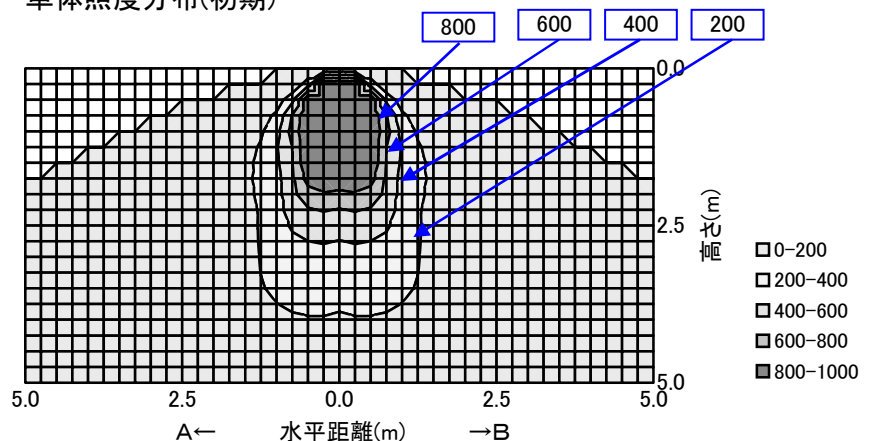

配光曲線

