


日立照明器具 照明特性

形式：MD1001A		反 射 率	天井	80%			70%				50%			30%			0%	
姿図 			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
光源		0.6	0.48	0.43	0.40	0.48	0.43	0.40	0.38	0.43	0.40	0.38	0.42	0.40	0.38	0.37		
		0.8	0.54	0.50	0.47	0.53	0.49	0.46	0.44	0.49	0.46	0.44	0.48	0.46	0.44	0.43		
		1	0.57	0.53	0.50	0.56	0.53	0.50	0.48	0.52	0.50	0.48	0.51	0.49	0.48	0.47		
		1.25	0.60	0.56	0.54	0.59	0.56	0.53	0.52	0.55	0.53	0.51	0.54	0.52	0.51	0.50		
		1.5	0.61	0.59	0.56	0.61	0.58	0.56	0.54	0.57	0.55	0.54	0.56	0.55	0.53	0.52		
品名 MF100L-A/BU-P		2	0.64	0.61	0.59	0.63	0.61	0.59	0.58	0.60	0.58	0.57	0.59	0.58	0.56	0.55		
		2.5	0.65	0.63	0.61	0.64	0.62	0.61	0.59	0.61	0.60	0.59	0.60	0.59	0.58	0.57		
		3	0.65	0.64	0.62	0.65	0.63	0.62	0.60	0.62	0.61	0.60	0.61	0.60	0.59	0.58		
		4	0.66	0.65	0.64	0.66	0.64	0.63	0.62	0.63	0.62	0.61	0.62	0.61	0.60	0.59		
		5	0.67	0.66	0.65	0.66	0.65	0.64	0.63	0.64	0.63	0.62	0.63	0.62	0.62	0.60		
光束 8,500 lm		7	0.68	0.67	0.67	0.67	0.67	0.66	0.65	0.65	0.65	0.64	0.64	0.64	0.63	0.62		
		10	0.69	0.68	0.68	0.68	0.68	0.67	0.67	0.66	0.66	0.66	0.65	0.65	0.65	0.63		

器具効率 $F_t = 63.8\%$

上方光束 $F_u = 0.0\%$

下方光束 $F_d = 63.8\%$

配光分類

BZ-

最大取付間隔

A-A 1.22 H


B-B H

保守率	良	0.50
	中	0.47
	否	0.42

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	440		
10	433		
20	408		
30	371		
40	190		
50	65		
60	2		
70	1		
80			
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

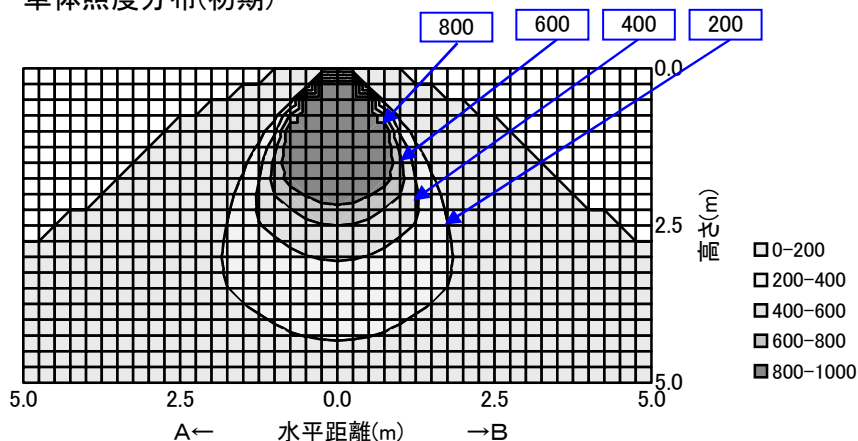

配光曲線

