


日立照明器具 照明特性

形式：MD1501T		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.48	0.42	0.38	0.47	0.41	0.38	0.35	0.41	0.37	0.35	0.40	0.37	0.35	0.33		
		0.8	0.54	0.48	0.45	0.53	0.48	0.44	0.42	0.47	0.44	0.42	0.46	0.43	0.41	0.40		
		1	0.58	0.53	0.49	0.57	0.52	0.49	0.46	0.51	0.48	0.46	0.50	0.48	0.46	0.44		
		1.25	0.61	0.56	0.53	0.60	0.56	0.53	0.50	0.55	0.52	0.50	0.54	0.51	0.49	0.48		
		1.5	0.63	0.59	0.56	0.62	0.59	0.56	0.54	0.57	0.55	0.53	0.56	0.54	0.52	0.51		
		2	0.66	0.63	0.60	0.65	0.62	0.60	0.58	0.61	0.59	0.57	0.59	0.58	0.56	0.55		
		2.5	0.67	0.65	0.62	0.66	0.64	0.62	0.60	0.62	0.61	0.59	0.61	0.60	0.58	0.57		
		3	0.68	0.66	0.64	0.67	0.65	0.63	0.62	0.64	0.62	0.61	0.62	0.61	0.60	0.58		
光源		4	0.69	0.68	0.66	0.68	0.67	0.65	0.64	0.65	0.64	0.63	0.64	0.63	0.62	0.60		
品名	タイルハイトランプ®	5	0.70	0.69	0.67	0.69	0.68	0.67	0.66	0.66	0.65	0.64	0.65	0.64	0.63	0.61		
形式	MT150FDX-N	7	0.72	0.71	0.70	0.71	0.70	0.69	0.68	0.68	0.67	0.67	0.66	0.66	0.65	0.63		
光束	10,500 lm	10	0.72	0.72	0.71	0.72	0.71	0.70	0.70	0.69	0.69	0.68	0.68	0.67	0.67	0.65		

器具効率 Ft= 67.9%

上方光束 Fu= 1.2%

下方光束 Fd= 66.7%

配光分類

BZ-

最大取付間隔

A-A 1.14 H


B-B H

保守率	良	0.65
	中	0.61
	否	0.54

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	416		
10	408		
20	370		
30	311		
40	209		
50	93		
60	32		
70	11		
80	5		
90	2		
100	2		
110	2		
120	2		
130	2		
140	2		
150	2		
160	2		
170	3		
180	2		

単体照度分布(初期)

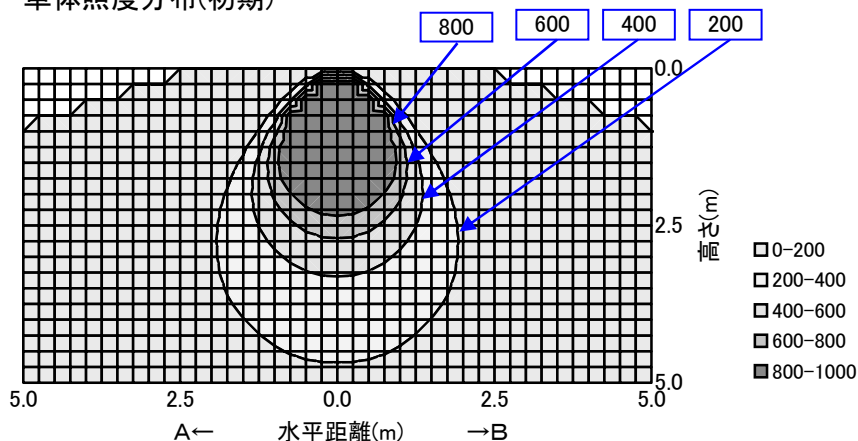

配光曲線

