

日立照明器具 照明特性

形式：MD1509		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.47	0.40	0.36	0.46	0.40	0.36	0.33	0.39	0.35	0.33	0.39	0.35	0.33	0.32		
		0.8	0.54	0.47	0.43	0.53	0.47	0.43	0.40	0.46	0.43	0.40	0.45	0.42	0.40	0.39		
		1	0.58	0.52	0.48	0.57	0.52	0.48	0.45	0.51	0.47	0.45	0.50	0.47	0.45	0.43		
		1.25	0.61	0.56	0.53	0.60	0.56	0.52	0.50	0.55	0.52	0.49	0.54	0.51	0.49	0.48		
		1.5	0.64	0.60	0.56	0.63	0.59	0.56	0.53	0.58	0.55	0.53	0.57	0.54	0.52	0.51		
		2	0.67	0.63	0.61	0.66	0.63	0.60	0.58	0.62	0.59	0.57	0.60	0.59	0.57	0.55		
		2.5	0.69	0.66	0.63	0.68	0.65	0.63	0.61	0.64	0.62	0.60	0.62	0.61	0.59	0.58		
		3	0.70	0.67	0.65	0.69	0.66	0.64	0.63	0.65	0.63	0.62	0.64	0.62	0.61	0.59		
		光源		4	0.71	0.69	0.67	0.70	0.68	0.67	0.65	0.67	0.66	0.64	0.66	0.64	0.63	0.62
品名	セラミックメタルハライドランプ	5	0.72	0.70	0.69	0.71	0.70	0.68	0.67	0.68	0.67	0.66	0.67	0.66	0.65	0.63		
形式	MT150FCE-WW-A	7	0.73	0.72	0.71	0.72	0.71	0.70	0.70	0.70	0.69	0.68	0.69	0.68	0.67	0.66		
光束	13,000 lm	10	0.74	0.74	0.73	0.73	0.73	0.72	0.72	0.71	0.71	0.70	0.70	0.70	0.69	0.67		

器具効率 Ft= 69.4%

上方光束 Fu= 0.0%

下方光束 Fd= 69.4%

配光分類

BZ-

最大取付間隔

A-A 1.30 H


B-B H

保守率	良	中	否
	0.65	0.61	0.54

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	292		
10	335		
20	402		
30	259		
40	204		
50	135		
60	65		
70	14		
80			
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

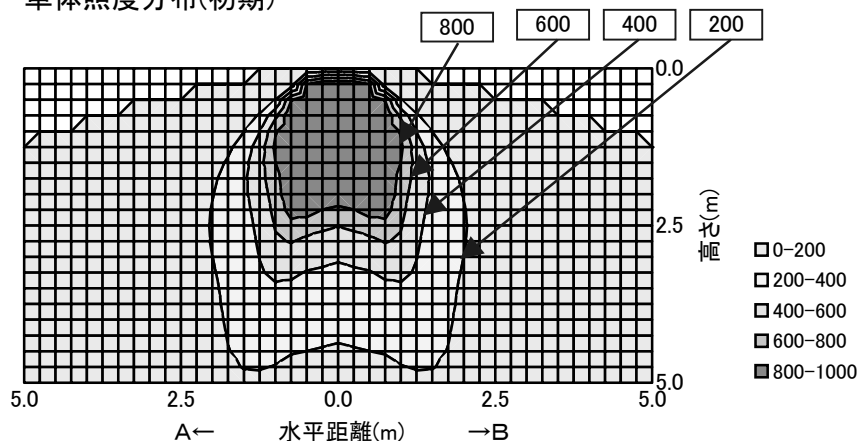

配光曲線

