

日立照明器具 照明特性

形式：MD2001		反 射 率	天井	80%			70%				50%			30%			0%
	壁		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
	床		10%														0%
	室指数		照明率 S/H=1.0														
		0.6	0.47	0.43	0.40	0.47	0.42	0.40	0.38	0.42	0.39	0.38	0.42	0.39	0.37	0.37	
		0.8	0.52	0.48	0.45	0.52	0.48	0.45	0.43	0.47	0.45	0.43	0.47	0.45	0.43	0.42	
		1	0.55	0.52	0.49	0.55	0.51	0.49	0.47	0.51	0.48	0.47	0.50	0.48	0.46	0.46	
		1.25	0.58	0.54	0.52	0.57	0.54	0.52	0.50	0.53	0.51	0.50	0.52	0.51	0.49	0.48	
		1.5	0.59	0.57	0.54	0.59	0.56	0.54	0.52	0.55	0.53	0.52	0.54	0.53	0.52	0.51	
		2	0.61	0.59	0.57	0.61	0.59	0.57	0.56	0.58	0.56	0.55	0.57	0.56	0.54	0.53	
		2.5	0.62	0.60	0.59	0.62	0.60	0.58	0.57	0.59	0.58	0.57	0.58	0.57	0.56	0.55	
		3	0.63	0.61	0.60	0.62	0.61	0.59	0.58	0.60	0.58	0.57	0.59	0.58	0.57	0.56	
光 源		4	0.64	0.62	0.61	0.63	0.62	0.61	0.60	0.61	0.60	0.59	0.60	0.59	0.58	0.57	
品名	メタルハライドランプ	5	0.64	0.63	0.62	0.64	0.63	0.62	0.61	0.62	0.61	0.60	0.60	0.60	0.59	0.58	
形式	MF250L-B/BU-P	7	0.65	0.65	0.64	0.65	0.64	0.63	0.63	0.63	0.62	0.62	0.62	0.61	0.61	0.59	
光束	22,000 lm	10	0.66	0.66	0.65	0.65	0.65	0.65	0.64	0.64	0.63	0.63	0.62	0.62	0.62	0.60	

器具効率 $F_t = 61.3\%$

上方光束 $F_u = 0.0\%$

下方光束 $F_d = 61.3\%$

配光分類

BZ-

最大取付間隔

A-A 1.02 H


B-B H

保守率	良	0.50
	中	0.47
	否	0.42

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	504		
10	492		
20	425		
30	315		
40	167		
50	59		
60	9		
70	2		
80	1		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

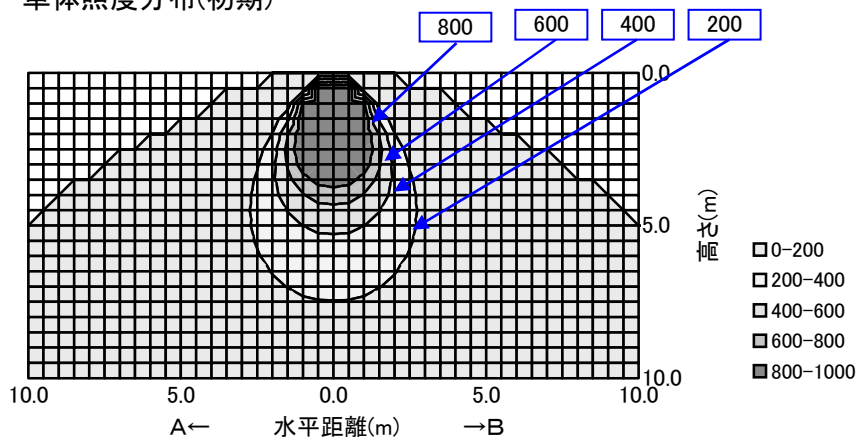

配光曲線

