

日立照明器具 照明特性

形式： MK10011+HF1000X		反 射 率	天井	80%			70%				50%			30%			0%
＜広照形＞			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
			室指数	照明率 S/H=1.0													
		0.6	0.55	0.48	0.43	0.55	0.47	0.42	0.39	0.46	0.42	0.39	0.46	0.42	0.39	0.37	
		0.8	0.63	0.56	0.52	0.62	0.56	0.51	0.48	0.55	0.51	0.48	0.54	0.50	0.48	0.46	
		1	0.68	0.62	0.58	0.67	0.61	0.57	0.54	0.60	0.57	0.54	0.59	0.56	0.53	0.52	
		1.25	0.72	0.67	0.63	0.71	0.66	0.62	0.59	0.65	0.61	0.59	0.64	0.61	0.58	0.57	
		1.5	0.75	0.70	0.67	0.74	0.70	0.66	0.63	0.68	0.65	0.63	0.67	0.64	0.62	0.60	
		2	0.78	0.75	0.72	0.77	0.74	0.71	0.69	0.72	0.70	0.68	0.71	0.69	0.67	0.65	
		2.5	0.80	0.77	0.74	0.79	0.76	0.74	0.72	0.75	0.72	0.71	0.73	0.71	0.70	0.68	
		3	0.81	0.79	0.76	0.80	0.78	0.75	0.74	0.76	0.74	0.72	0.74	0.73	0.71	0.69	
光 源		4	0.83	0.81	0.79	0.82	0.80	0.78	0.76	0.78	0.76	0.75	0.76	0.75	0.74	0.72	
品名	蛍光水銀ランプ	5	0.84	0.82	0.81	0.83	0.81	0.80	0.78	0.80	0.78	0.77	0.78	0.77	0.76	0.74	
形式	HF1000X	7	0.86	0.84	0.83	0.84	0.83	0.82	0.81	0.82	0.81	0.80	0.80	0.79	0.78	0.76	
光束	59,500 lm	10	0.87	0.86	0.85	0.86	0.85	0.84	0.84	0.83	0.83	0.82	0.81	0.81	0.80	0.78	

器具効率 $F_t = 81.1\%$
 上方光束 $F_u = 1.0\%$
 下方光束 $F_d = 80.1\%$

配光分類

BZ-

最大取付間隔

A-A 1.28 H


B-B H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	404		
10	418		
20	416		
30	353		
40	275		
50	147		
60	42		
70	6		
80	1		
90	1		
100	1		
110	1		
120	2		
130	2		
140	2		
150	2		
160	2		
170	2		
180	2		

単体照度分布(初期)

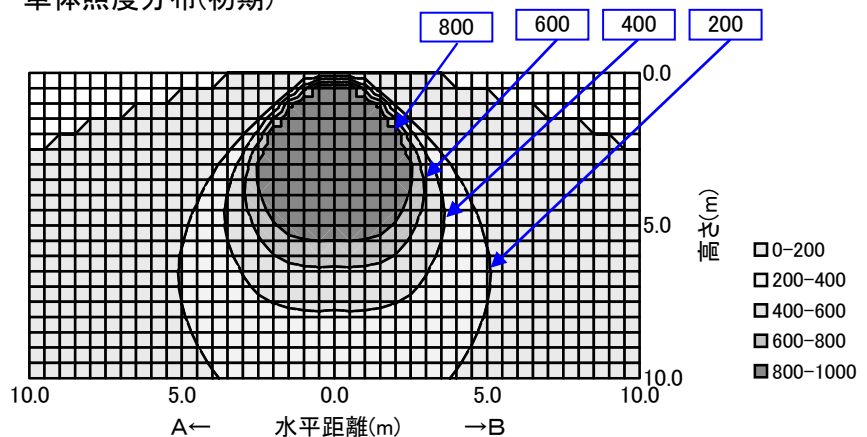

配光曲線

