

日立照明器具 照明特性

形式： MK10011+MF1000L		反 射 率	天井	80%			70%				50%			30%			0%	
<広照形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.57	0.49	0.45	0.56	0.49	0.44	0.41	0.48	0.44	0.41	0.47	0.44	0.41	0.40		
		0.8	0.64	0.58	0.53	0.63	0.57	0.53	0.50	0.56	0.52	0.50	0.55	0.52	0.49	0.48		
		1	0.69	0.63	0.59	0.68	0.63	0.59	0.56	0.61	0.58	0.55	0.60	0.57	0.55	0.53		
		1.25	0.73	0.68	0.64	0.72	0.67	0.63	0.61	0.66	0.63	0.60	0.65	0.62	0.60	0.58		
		1.5	0.76	0.71	0.68	0.75	0.70	0.67	0.64	0.69	0.66	0.64	0.68	0.65	0.63	0.62		
		2	0.79	0.75	0.72	0.78	0.75	0.72	0.70	0.73	0.71	0.69	0.72	0.70	0.68	0.66		
		2.5	0.81	0.78	0.75	0.80	0.77	0.74	0.72	0.75	0.73	0.71	0.74	0.72	0.71	0.69		
		3	0.82	0.79	0.77	0.81	0.78	0.76	0.74	0.77	0.75	0.73	0.75	0.73	0.72	0.70		
光 源		4	0.83	0.81	0.79	0.82	0.80	0.78	0.77	0.78	0.77	0.76	0.77	0.76	0.74	0.72		
品名	メタルハイトランプ	5	0.84	0.83	0.81	0.83	0.82	0.80	0.79	0.80	0.79	0.78	0.78	0.77	0.76	0.74		
形式	MF1000-L-C/BU	7	0.86	0.85	0.84	0.85	0.84	0.83	0.82	0.82	0.81	0.80	0.80	0.79	0.79	0.76		
光束	96,000 lm	10	0.87	0.86	0.86	0.86	0.85	0.85	0.84	0.83	0.83	0.82	0.82	0.81	0.81	0.78		

器具効率 Ft= 81.1%

上方光束 Fu= 0.8%

下方光束 Fd= 80.3%

配光分類

BZ-

最大取付間隔

A-A 1.24 H


B-B H

保守率	良	0.50
	中	0.47
	否	0.42

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	432		
10	456		
20	448		
30	365		
40	268		
50	131		
60	36		
70	6		
80	1		
90	1		
100	1		
110	1		
120	1		
130	1		
140	2		
150	2		
160	2		
170	2		
180	2		

単体照度分布(初期)

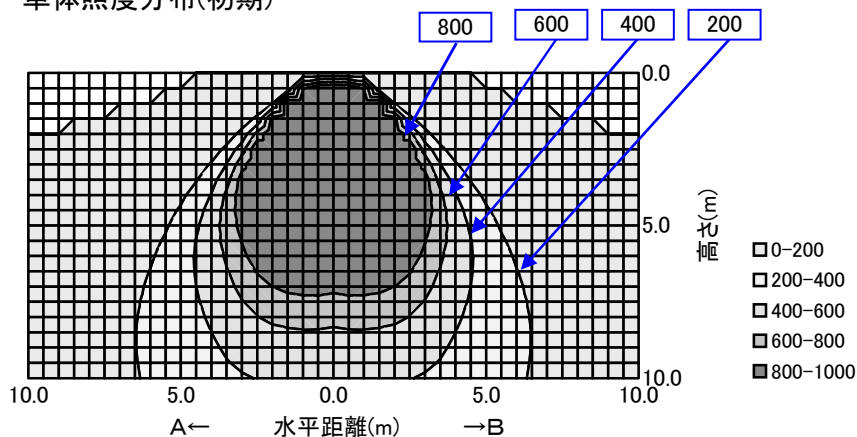

配光曲線

