

日立照明器具 照明特性

形式: MK10011+MF700L ＜広照形＞	天井	80%			70%				50%			30%			0%
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
	床	10%													
	室指数	照明率 S/H=1.0													
姿図 	0.6	0.55	0.48	0.43	0.55	0.47	0.42	0.39	0.46	0.42	0.39	0.46	0.42	0.39	0.37
	0.8	0.63	0.56	0.52	0.62	0.56	0.51	0.48	0.55	0.51	0.48	0.54	0.50	0.48	0.46
	1	0.68	0.62	0.58	0.67	0.61	0.57	0.54	0.60	0.57	0.54	0.59	0.56	0.53	0.52
	1.25	0.72	0.67	0.63	0.71	0.66	0.62	0.59	0.65	0.61	0.59	0.64	0.61	0.58	0.57
	1.5	0.75	0.70	0.67	0.74	0.70	0.66	0.63	0.68	0.65	0.63	0.67	0.64	0.62	0.60
	2	0.78	0.75	0.72	0.77	0.74	0.71	0.69	0.72	0.70	0.68	0.71	0.69	0.67	0.65
	2.5	0.80	0.77	0.74	0.79	0.76	0.74	0.72	0.75	0.72	0.71	0.73	0.71	0.70	0.68
	3	0.81	0.79	0.76	0.80	0.78	0.75	0.74	0.76	0.74	0.72	0.74	0.73	0.71	0.69
	4	0.83	0.81	0.79	0.82	0.80	0.78	0.76	0.78	0.76	0.75	0.76	0.75	0.74	0.72
	5	0.84	0.82	0.81	0.83	0.81	0.80	0.78	0.80	0.78	0.77	0.78	0.77	0.76	0.74
光源															
品名	メタルハライドランプ	5	0.84	0.82	0.81	0.83	0.81	0.80	0.78	0.80	0.78	0.77	0.78	0.77	0.76
形式	MF700L/BU	7	0.86	0.84	0.83	0.84	0.83	0.82	0.81	0.82	0.81	0.80	0.80	0.79	0.78
光束	64,000 lm	10	0.87	0.86	0.85	0.86	0.85	0.84	0.84	0.83	0.83	0.82	0.81	0.81	0.80

器具効率 $F_t = 81.1\%$
 上方光束 $F_u = 1.0\%$
 下方光束 $F_d = 80.1\%$

配光分類

BZ-

最大取付間隔

A-A 1.28 H

B-B H

保守率


良
中
否

0.51
0.48
0.43

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	404		
10	418		
20	416		
30	353		
40	275		
50	147		
60	42		
70	6		
80	1		
90	1		
100	1		
110	1		
120	2		
130	2		
140	2		
150	2		
160	2		
170	2		
180	2		

単体照度分布(初期)

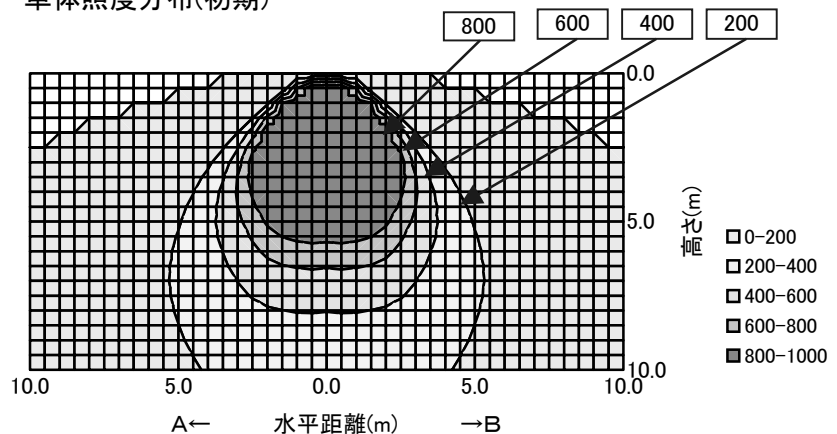

配光曲線

