

日立照明器具 照明特性

形式: MK2501P+MF250L	天井	80%			70%				50%			30%			0%
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
	床	10%													0%
	室指数	照明率 S/H=1.0													
姿図 	0.6	0.48	0.38	0.31	0.46	0.37	0.30	0.26	0.34	0.29	0.25	0.32	0.27	0.24	0.21
	0.8	0.57	0.47	0.40	0.55	0.46	0.40	0.35	0.43	0.38	0.34	0.41	0.36	0.32	0.29
	1	0.63	0.54	0.47	0.61	0.52	0.46	0.41	0.49	0.44	0.40	0.46	0.42	0.38	0.35
	1.25	0.68	0.60	0.54	0.66	0.58	0.52	0.48	0.55	0.50	0.46	0.51	0.47	0.44	0.40
	1.5	0.72	0.64	0.59	0.69	0.63	0.57	0.53	0.59	0.54	0.50	0.55	0.51	0.48	0.44
	2	0.77	0.70	0.65	0.74	0.68	0.63	0.59	0.64	0.60	0.57	0.60	0.57	0.54	0.49
	2.5	0.80	0.74	0.69	0.77	0.72	0.67	0.64	0.67	0.64	0.61	0.63	0.60	0.58	0.53
	3	0.82	0.76	0.72	0.79	0.74	0.70	0.67	0.70	0.66	0.63	0.65	0.63	0.60	0.55
	4	0.84	0.80	0.76	0.81	0.77	0.74	0.71	0.73	0.70	0.67	0.68	0.66	0.64	0.58
	5	0.86	0.82	0.79	0.83	0.80	0.77	0.74	0.75	0.73	0.70	0.71	0.69	0.67	0.61
光源															
品名	メタルハライドランプ	5	0.86	0.82	0.79	0.83	0.80	0.77	0.74	0.75	0.73	0.70	0.71	0.69	0.67
形式	MF250L-B/BU-P	7	0.88	0.86	0.83	0.85	0.83	0.81	0.79	0.78	0.76	0.75	0.73	0.72	0.71
光束	22,000 lm	10	0.90	0.88	0.86	0.87	0.86	0.84	0.83	0.81	0.79	0.78	0.76	0.75	0.74

器具効率 Ft= 89.1%
 上方光束 Fu= 15.2%
 下方光束 Fd= 73.8%

配光分類

BZ-

最大取付間隔

A-A 1.96 H


B-B H

保守率	良	0.50
	中	0.47
	否	0.42

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	168		
10	173		
20	190		
30	233		
40	276		
50	167		
60	64		
70	39		
80	41		
90	43		
100	42		
110	34		
120	24		
130	17		
140	11		
150	4		
160	3		
170	2		
180	1		

単体照度分布(初期)

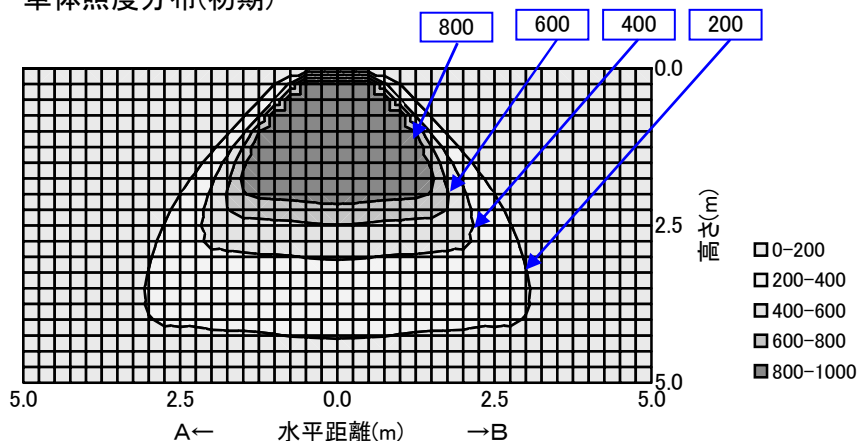

配光曲線

