

日立照明器具 照明特性

形式: MK4010+HF400X		天井	80%			70%				50%			30%			0%
<特広照形>		反射率	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁														
		床	10%													
		室指数	照明率 S/H=1.0													
姿図 	光源	0.6	0.52	0.44	0.38	0.51	0.43	0.38	0.35	0.42	0.38	0.35	0.42	0.37	0.34	0.33
		0.8	0.60	0.53	0.48	0.59	0.52	0.47	0.44	0.51	0.47	0.44	0.50	0.46	0.43	0.42
		1	0.65	0.58	0.54	0.64	0.58	0.53	0.50	0.57	0.53	0.50	0.55	0.52	0.49	0.48
		1.25	0.69	0.63	0.59	0.68	0.63	0.59	0.56	0.61	0.58	0.55	0.60	0.57	0.55	0.53
		1.5	0.72	0.67	0.63	0.71	0.66	0.63	0.60	0.65	0.62	0.59	0.63	0.61	0.59	0.57
		2	0.76	0.72	0.68	0.74	0.71	0.68	0.65	0.69	0.67	0.64	0.68	0.66	0.64	0.62
		2.5	0.77	0.74	0.71	0.76	0.73	0.71	0.68	0.72	0.69	0.67	0.70	0.68	0.66	0.65
		3	0.79	0.76	0.73	0.78	0.75	0.72	0.70	0.73	0.71	0.69	0.71	0.70	0.68	0.66
		4	0.80	0.78	0.76	0.79	0.77	0.75	0.73	0.75	0.74	0.72	0.74	0.72	0.71	0.69
		5	0.81	0.80	0.78	0.80	0.79	0.77	0.76	0.77	0.75	0.74	0.75	0.74	0.73	0.71
品名	蛍光水銀ランプ	7	0.83	0.82	0.81	0.82	0.81	0.80	0.79	0.79	0.78	0.77	0.77	0.76	0.76	0.73
形式	HF400X	10	0.84	0.83	0.83	0.83	0.82	0.82	0.81	0.81	0.80	0.79	0.79	0.78	0.78	0.75
光束	22,000 lm															

器具効率 Ft= 78.8%

上方光束 Fu= 1.2%

下方光束 Fd= 77.6%

配光分類

BZ-

最大取付間隔

A-A 1.56 H


B-B H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	297		
10	317		
20	355		
30	346		
40	280		
50	158		
60	49		
70	9		
80	2		
90	1		
100	1		
110	1		
120	2		
130	3		
140	3		
150	3		
160	2		
170	2		
180	2		

単体照度分布(初期)

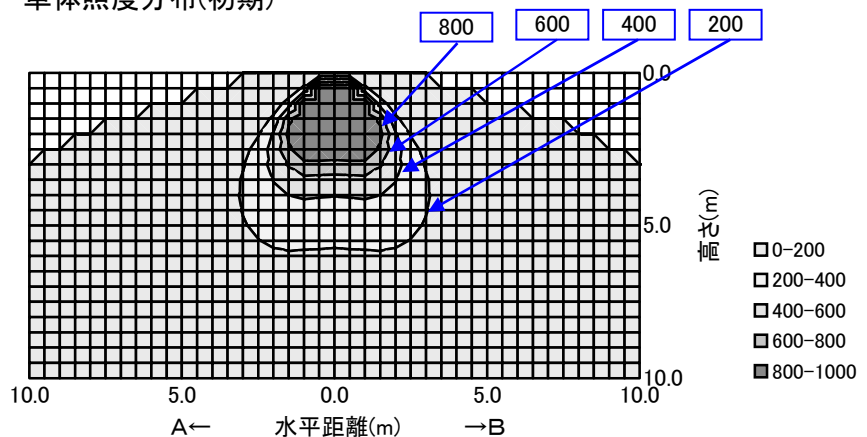

配光曲線

