

日立照明器具 照明特性

形式：MK4010+MF400L		反 射 率	天井			80%				70%				50%			30%			0%
<特広照形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
			床	10%															0%	
			室指数	照明率 S/H=1.0																
姿図			0.6	0.54	0.46	0.41	0.53	0.46	0.41	0.38	0.45	0.41	0.38	0.44	0.40	0.37	0.36			
			0.8	0.62	0.55	0.51	0.61	0.55	0.50	0.47	0.54	0.50	0.47	0.53	0.49	0.46	0.45			
			1	0.67	0.61	0.56	0.66	0.60	0.56	0.53	0.59	0.55	0.52	0.58	0.55	0.52	0.51			
			1.25	0.71	0.66	0.62	0.70	0.65	0.61	0.58	0.64	0.60	0.58	0.62	0.60	0.57	0.55			
			1.5	0.74	0.69	0.66	0.73	0.68	0.65	0.62	0.67	0.64	0.62	0.66	0.63	0.61	0.59			
			2	0.77	0.74	0.71	0.76	0.73	0.70	0.68	0.71	0.69	0.67	0.70	0.68	0.66	0.64			
			2.5	0.79	0.76	0.73	0.78	0.75	0.73	0.70	0.74	0.71	0.69	0.72	0.70	0.69	0.67			
			3	0.80	0.78	0.75	0.79	0.77	0.74	0.72	0.75	0.73	0.71	0.73	0.72	0.70	0.68			
光 源			4	0.82	0.80	0.78	0.81	0.79	0.77	0.75	0.77	0.75	0.74	0.75	0.74	0.73	0.71			
品名	メタルハライドランプ		5	0.83	0.81	0.80	0.82	0.80	0.79	0.77	0.78	0.77	0.76	0.77	0.76	0.75	0.72			
形式	MF400L-B/BU-P		7	0.85	0.83	0.82	0.83	0.82	0.81	0.80	0.80	0.80	0.79	0.79	0.78	0.77	0.75			
光束	42,000 lm		10	0.86	0.85	0.84	0.85	0.84	0.83	0.83	0.82	0.82	0.81	0.80	0.80	0.79	0.77			

器具効率 $F_t=$ 80.2%

上方光束 $F_u=$ 1.2%

下方光束 $F_d=$ 79.0%

配光分類

BZ-

最大取付間隔

A-A 1.54 H


B-B H

保守率	良	0.50
	中	0.47
	否	0.42

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	317		
10	337		
20	392		
30	394		
40	281		
50	134		
60	37		
70	8		
80	3		
90	1		
100	1		
110	1		
120	2		
130	3		
140	4		
150	2		
160	2		
170	2		
180	2		

単体照度分布(初期)

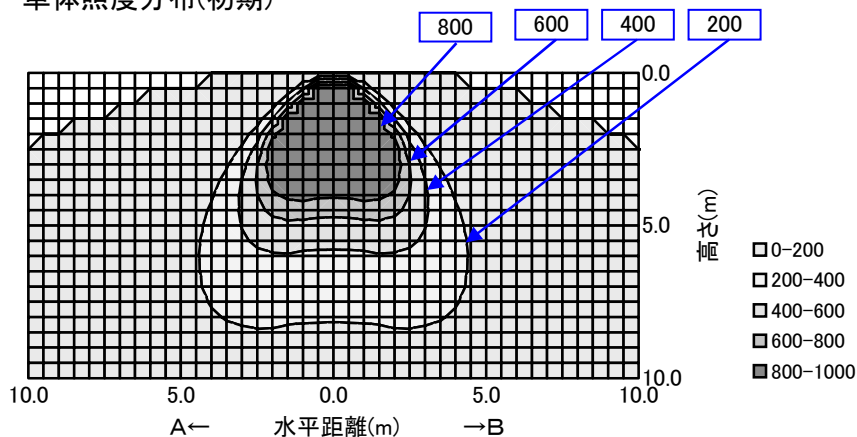

配光曲線

