

日立照明器具 照明特性

形式: MK4010+NH360FL <特広照形>	天井	80%			70%				50%			30%			0%
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
	床	10%													0%
	室指数	照明率 S/H=1.0													
姿図 	0.6	0.52	0.44	0.39	0.51	0.44	0.39	0.35	0.43	0.38	0.35	0.42	0.38	0.35	0.34
	0.8	0.60	0.53	0.48	0.59	0.53	0.48	0.45	0.52	0.47	0.44	0.51	0.47	0.44	0.43
	1	0.65	0.59	0.54	0.64	0.58	0.54	0.51	0.57	0.53	0.50	0.56	0.53	0.50	0.49
	1.25	0.69	0.64	0.60	0.68	0.63	0.59	0.56	0.62	0.58	0.56	0.61	0.58	0.55	0.54
	1.5	0.72	0.68	0.64	0.71	0.67	0.63	0.60	0.65	0.62	0.60	0.64	0.62	0.59	0.58
	2	0.76	0.72	0.69	0.75	0.71	0.68	0.66	0.70	0.67	0.65	0.68	0.66	0.64	0.63
	2.5	0.78	0.75	0.72	0.77	0.74	0.71	0.69	0.72	0.70	0.68	0.71	0.69	0.67	0.65
	3	0.79	0.76	0.74	0.78	0.75	0.73	0.71	0.74	0.72	0.70	0.72	0.70	0.69	0.67
	4	0.81	0.78	0.76	0.80	0.77	0.76	0.74	0.76	0.74	0.73	0.74	0.73	0.72	0.69
	5	0.82	0.80	0.78	0.81	0.79	0.78	0.76	0.77	0.76	0.75	0.76	0.75	0.74	0.71
光源															
品名	高压ナトリウムランプ	5	0.82	0.80	0.78	0.81	0.79	0.78	0.76	0.77	0.76	0.75	0.76	0.75	0.74
形式	NH360FL	7	0.83	0.82	0.81	0.82	0.81	0.80	0.79	0.79	0.78	0.78	0.78	0.77	0.76
光束	47,500 lm	10	0.85	0.84	0.83	0.83	0.83	0.82	0.82	0.81	0.80	0.80	0.79	0.79	0.78

器具効率 Ft= 79.0%
 上方光束 Fu= 0.9%
 下方光束 Fd= 78.2%

配光分類
 BZ-


最大取付間隔
 A-A 1.62 H
 B-B H

保守率
 良 0.79
 中 0.75
 否 0.66

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	280		
10	301		
20	369		
30	359		
40	284		
50	158		
60	45		
70	8		
80	1		
90	1		
100	1		
110	1		
120	1		
130	2		
140	2		
150	2		
160	2		
170	2		
180	2		

単体照度分布(初期)

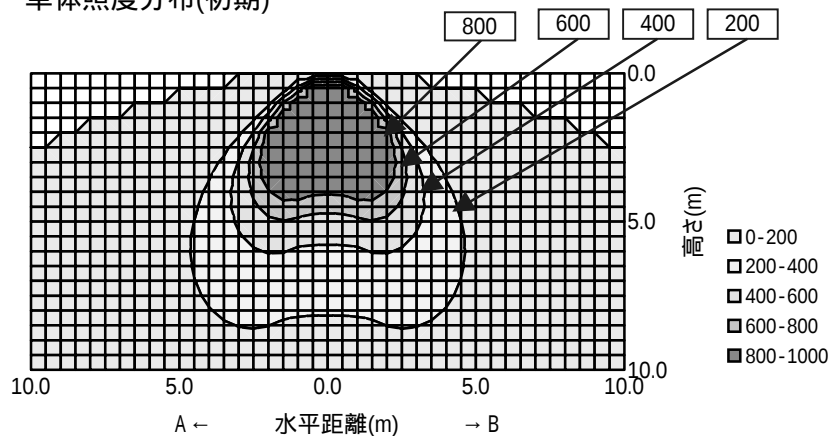

配光曲線

