


日立照明器具 照明特性

形式： MK4010P+HF400X <高効率・特広照形>	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
姿図 	0.6	0.61	0.53	0.48	0.60	0.53	0.48	0.45	0.52	0.48	0.45	0.51	0.48	0.45	0.43	
	0.8	0.69	0.62	0.57	0.68	0.62	0.57	0.54	0.61	0.57	0.54	0.60	0.56	0.54	0.52	
	1	0.73	0.68	0.63	0.72	0.67	0.63	0.60	0.66	0.62	0.60	0.65	0.62	0.59	0.58	
	1.25	0.77	0.72	0.68	0.76	0.72	0.68	0.65	0.70	0.67	0.65	0.69	0.67	0.64	0.63	
	1.5	0.80	0.76	0.72	0.79	0.75	0.72	0.69	0.74	0.71	0.69	0.72	0.70	0.68	0.66	
	2	0.83	0.80	0.77	0.82	0.79	0.76	0.74	0.78	0.75	0.73	0.76	0.74	0.73	0.71	
	2.5	0.85	0.82	0.79	0.84	0.81	0.79	0.77	0.80	0.78	0.76	0.78	0.77	0.75	0.73	
	3	0.86	0.83	0.81	0.85	0.83	0.80	0.79	0.81	0.79	0.78	0.80	0.78	0.77	0.75	
光源	4	0.87	0.85	0.83	0.86	0.85	0.83	0.81	0.83	0.81	0.80	0.81	0.80	0.79	0.77	
品名 蛍光水銀ランプ	5	0.89	0.87	0.85	0.88	0.86	0.85	0.83	0.84	0.83	0.82	0.83	0.82	0.81	0.79	
形式 HF400X	7	0.90	0.89	0.88	0.89	0.88	0.87	0.86	0.86	0.85	0.85	0.85	0.84	0.83	0.81	
光束 22,000 lm	10	0.91	0.90	0.90	0.90	0.90	0.89	0.88	0.88	0.87	0.87	0.86	0.86	0.85	0.83	

器具効率 Ft= 84.7%		
上方光束 Fu= 0.0%		
下方光束 Fd= 84.7%		
配光分類 BZ-		
最大取付間隔		
A-A	1.30	H
B-B		H
保守率	良	0.73
	中	0.69
	否	0.61
光度 (cd/1000 lm)		
	A-0	B-B
0	451	
10	482	
20	495	
30	417	
40	287	
50	126	
60	24	
70	3	
80		
90		
100		
110		
120		
130		
140		
150		
160		
170		
180		

単体照度分布(初期)

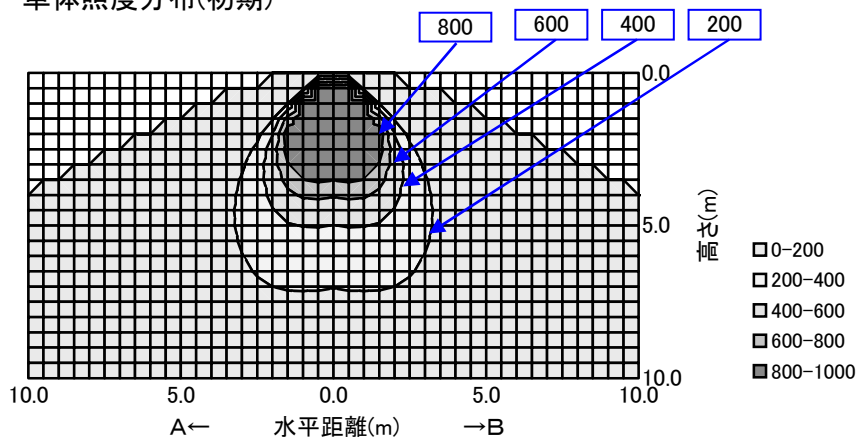

配光曲線

