

日立照明器具 照明特性

形式: MK4010P+MF270CL		天井	80%			70%				50%			30%			0%
< 高効率・特広照明形 >		反射率	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁														
		床	10%													
		室指数	照明率 S/H=1.0													
姿図 		0.6	0.66	0.58	0.53	0.65	0.58	0.53	0.50	0.57	0.52	0.49	0.56	0.52	0.49	0.48
		0.8	0.74	0.68	0.63	0.73	0.67	0.62	0.59	0.66	0.62	0.59	0.65	0.61	0.59	0.57
		1	0.79	0.73	0.69	0.78	0.73	0.68	0.65	0.71	0.68	0.65	0.70	0.67	0.64	0.63
		1.25	0.83	0.78	0.74	0.82	0.77	0.73	0.70	0.76	0.73	0.70	0.74	0.72	0.69	0.68
		1.5	0.86	0.82	0.78	0.85	0.81	0.77	0.75	0.79	0.76	0.74	0.78	0.75	0.73	0.71
		2	0.90	0.86	0.83	0.88	0.85	0.82	0.80	0.83	0.81	0.79	0.82	0.80	0.78	0.76
		2.5	0.91	0.88	0.85	0.90	0.87	0.85	0.83	0.85	0.83	0.81	0.84	0.82	0.80	0.78
		3	0.92	0.90	0.87	0.91	0.89	0.86	0.84	0.87	0.85	0.83	0.85	0.83	0.82	0.80
		4	0.94	0.92	0.90	0.93	0.91	0.89	0.87	0.89	0.87	0.86	0.87	0.85	0.84	0.82
		5	0.95	0.93	0.92	0.94	0.92	0.91	0.89	0.90	0.89	0.88	0.88	0.87	0.86	0.84
光源																
品名	< メタラム・L >															
形式	MF300CL/BUD/270-V															
光束	28,400 lm															
		10	0.98	0.97	0.96	0.97	0.96	0.95	0.95	0.94	0.93	0.93	0.92	0.91	0.91	0.88

器具効率 Ft= 91.2%

上方光束 Fu= 1.5%

下方光束 Fd= 89.8%

配光分類

BZ-

最大取付間隔

A-A 1.36 H


B-B H

保守率	良	0.74
	中	0.70
	否	0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	474		
10	450		
20	509		
30	570		
40	258		
50	110		
60	20		
70	4		
80	2		
90	2		
100	3		
110	3		
120	4		
130	4		
140			
150			
160			
170			
180			

単体照度分布(初期)

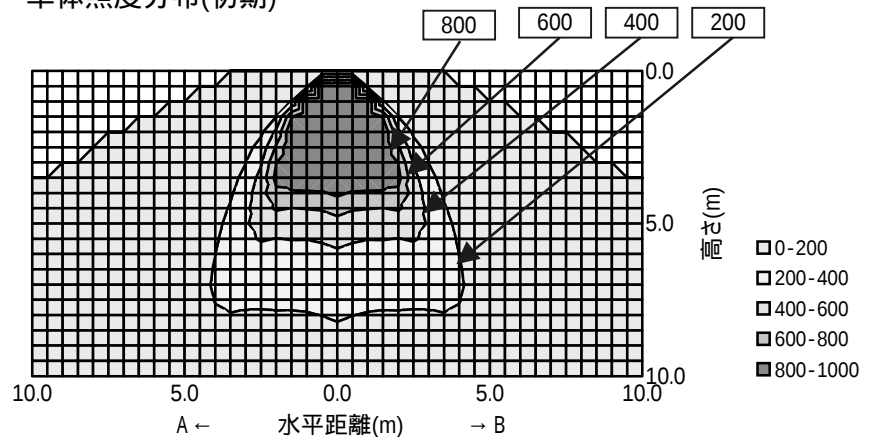

配光曲線

