

日立照明器具 照明特性

形式: MK4011+HF400X		天井	80%			70%				50%			30%			0%
<広照形>		反射率	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁														
		床	10%													
		室指数	照明率 S/H=1.0													
姿図 	光源	0.6	0.55	0.48	0.43	0.54	0.47	0.43	0.40	0.46	0.42	0.39	0.46	0.42	0.39	0.38
		0.8	0.63	0.56	0.51	0.61	0.55	0.51	0.48	0.54	0.51	0.48	0.53	0.50	0.47	0.46
		1	0.67	0.61	0.57	0.66	0.61	0.57	0.54	0.59	0.56	0.53	0.58	0.55	0.53	0.51
		1.25	0.71	0.66	0.62	0.70	0.65	0.61	0.58	0.64	0.60	0.58	0.62	0.60	0.57	0.56
		1.5	0.74	0.69	0.66	0.72	0.68	0.65	0.62	0.67	0.64	0.62	0.65	0.63	0.61	0.59
		2	0.77	0.73	0.70	0.76	0.72	0.70	0.67	0.71	0.68	0.66	0.69	0.67	0.65	0.64
		2.5	0.79	0.75	0.73	0.77	0.75	0.72	0.70	0.73	0.71	0.69	0.71	0.69	0.68	0.66
		3	0.80	0.77	0.75	0.78	0.76	0.74	0.72	0.74	0.72	0.71	0.72	0.71	0.69	0.67
		4	0.81	0.79	0.77	0.80	0.78	0.76	0.75	0.76	0.74	0.73	0.74	0.73	0.72	0.69
		5	0.82	0.80	0.79	0.81	0.79	0.78	0.77	0.77	0.76	0.75	0.75	0.74	0.74	0.71
品名	蛍光水銀ランプ	7	0.84	0.82	0.81	0.82	0.81	0.80	0.79	0.79	0.78	0.78	0.77	0.77	0.76	0.73
形式	HF400X	10	0.85	0.84	0.83	0.83	0.83	0.82	0.82	0.81	0.80	0.80	0.79	0.78	0.78	0.75
光束	22,000 lm															

器具効率 Ft= 79.4%
 上方光束 Fu= 2.1%
 下方光束 Fd= 77.3%

配光分類

BZ-

最大取付間隔

A-A 1.24 H


B-B H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	419		
10	434		
20	421		
30	358		
40	251		
50	129		
60	35		
70	7		
80	2		
90	2		
100	2		
110	2		
120	4		
130	5		
140	6		
150	4		
160	2		
170	2		
180	2		

単体照度分布(初期)

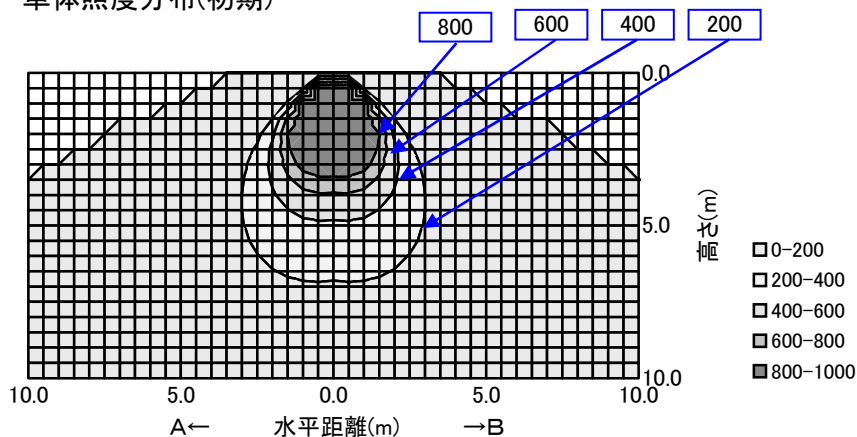

配光曲線

