

日立照明器具 照明特性

形式: MK4011+MF270CL		天井	80%			70%				50%			30%			0%
<広照形>		反射率	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁	10%													
		床	10%													
		室指数	照明率 S/H=1.0													
姿図 		0.6	0.63	0.56	0.51	0.62	0.56	0.51	0.48	0.55	0.51	0.48	0.54	0.50	0.47	0.46
		0.8	0.71	0.65	0.60	0.70	0.64	0.60	0.57	0.63	0.59	0.56	0.62	0.59	0.56	0.55
		1	0.76	0.70	0.66	0.75	0.69	0.65	0.62	0.68	0.65	0.62	0.67	0.64	0.62	0.60
		1.25	0.79	0.74	0.71	0.78	0.74	0.70	0.67	0.72	0.69	0.67	0.71	0.69	0.66	0.65
		1.5	0.82	0.78	0.74	0.81	0.77	0.74	0.71	0.76	0.73	0.71	0.74	0.72	0.70	0.68
		2	0.85	0.82	0.79	0.84	0.81	0.78	0.76	0.80	0.77	0.75	0.78	0.76	0.75	0.73
		2.5	0.87	0.84	0.82	0.86	0.83	0.81	0.79	0.82	0.80	0.78	0.80	0.78	0.77	0.75
		3	0.88	0.85	0.83	0.87	0.85	0.82	0.81	0.83	0.81	0.79	0.81	0.80	0.78	0.76
		4	0.89	0.87	0.85	0.88	0.86	0.85	0.83	0.85	0.83	0.82	0.83	0.82	0.81	0.78
		5	0.90	0.89	0.87	0.89	0.88	0.86	0.85	0.86	0.85	0.84	0.84	0.83	0.82	0.80
光源																
品名	<マセラム・L>															
形式	MF300CL/BUD/270-V															
光束	28,400 lm															
		10	0.93	0.92	0.92	0.92	0.91	0.91	0.90	0.89	0.89	0.88	0.88	0.87	0.87	0.84

器具効率 Ft= 86.7%

上方光束 Fu= 0.8%

下方光束 Fd= 85.8%

配光分類

BZ-

最大取付間隔

A-A 1.26 H


B-B H

保守率	良	0.74
	中	0.70
	否	0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	512		
10	485		
20	530		
30	475		
40	252		
50	110		
60	24		
70	4		
80	1		
90			
100	1		
110	1		
120	3		
130	4		
140			
150			
160			
170			
180			

単体照度分布(初期)

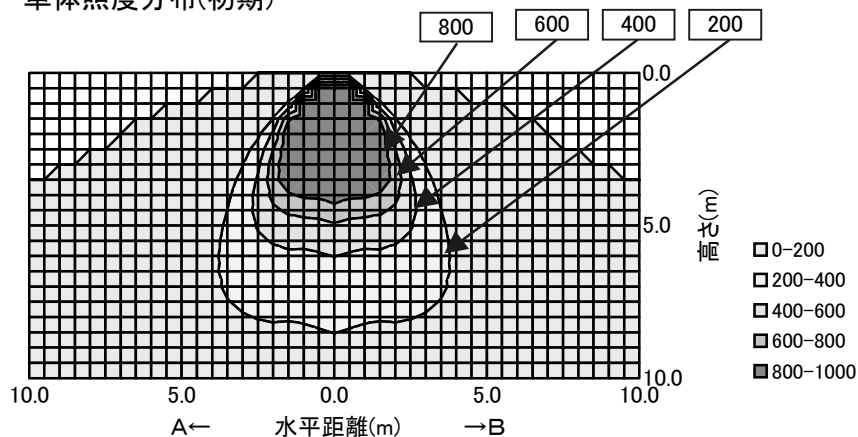

配光曲線

