

日立照明器具 照明特性

形式：MK4011+MF400CL		反 射 率	天井	80%			70%				50%			30%			0%	
<広照形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.2														
姿図 		0.6	0.57	0.51	0.46	0.57	0.50	0.46	0.43	0.49	0.46	0.43	0.49	0.45	0.43	0.41		
		0.8	0.64	0.57	0.53	0.63	0.57	0.53	0.50	0.56	0.52	0.49	0.55	0.52	0.49	0.48		
		1	0.68	0.62	0.58	0.67	0.61	0.58	0.55	0.60	0.57	0.54	0.59	0.56	0.54	0.52		
		1.25	0.71	0.66	0.63	0.70	0.66	0.62	0.59	0.64	0.61	0.59	0.63	0.60	0.58	0.57		
		1.5	0.74	0.70	0.66	0.73	0.69	0.66	0.63	0.67	0.65	0.62	0.66	0.64	0.62	0.60		
		2	0.77	0.74	0.71	0.76	0.73	0.70	0.68	0.71	0.69	0.67	0.70	0.68	0.66	0.64		
		2.5	0.79	0.76	0.74	0.78	0.75	0.73	0.71	0.74	0.72	0.70	0.72	0.70	0.69	0.67		
		3	0.80	0.78	0.76	0.79	0.77	0.75	0.73	0.75	0.73	0.72	0.73	0.72	0.71	0.69		
光 源		4	0.82	0.80	0.78	0.80	0.79	0.77	0.76	0.77	0.75	0.74	0.75	0.74	0.73	0.70		
品名	<メタセラム・L>	5	0.82	0.81	0.79	0.81	0.80	0.78	0.77	0.78	0.77	0.76	0.76	0.75	0.74	0.72		
形式	MF400CL/BUD/360VB	7	0.83	0.82	0.81	0.82	0.81	0.80	0.79	0.79	0.78	0.78	0.77	0.77	0.76	0.73		
光束	43,500 lm	10	0.84	0.83	0.83	0.83	0.82	0.82	0.81	0.80	0.80	0.79	0.78	0.78	0.77	0.75		

器具効率 Ft= 79.4%

上方光束 Fu= 2.1%

下方光束 Fd= 77.3%

配光分類

BZ-

最大取付間隔

A-A 1.24 H


B-B H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	419		
10	434		
20	421		
30	358		
40	251		
50	129		
60	35		
70	7		
80	2		
90	2		
100	2		
110	2		
120	4		
130	5		
140	6		
150	4		
160	2		
170	2		
180	2		

単体照度分布(初期)

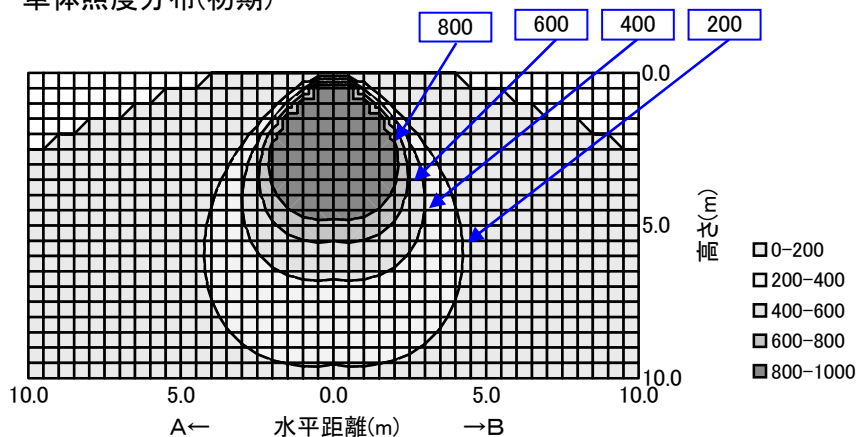

配光曲線

