

日立照明器具 照明特性

形式: MK4011+MF400L		天井	80%			70%				50%			30%			0%
<広照形>	反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.2													
姿図 	0.6	0.59	0.53	0.49	0.58	0.52	0.49	0.46	0.52	0.48	0.46	0.51	0.48	0.45	0.44	
	0.8	0.65	0.59	0.55	0.64	0.59	0.55	0.52	0.58	0.54	0.52	0.57	0.54	0.52	0.50	
	1	0.69	0.64	0.60	0.68	0.63	0.59	0.57	0.62	0.59	0.56	0.61	0.58	0.56	0.54	
	1.25	0.72	0.68	0.64	0.71	0.67	0.64	0.61	0.66	0.63	0.61	0.65	0.62	0.60	0.58	
	1.5	0.75	0.71	0.68	0.74	0.70	0.67	0.65	0.69	0.66	0.64	0.67	0.65	0.63	0.62	
	2	0.78	0.75	0.72	0.77	0.74	0.71	0.69	0.72	0.70	0.68	0.71	0.69	0.68	0.66	
	2.5	0.80	0.77	0.75	0.78	0.76	0.74	0.72	0.74	0.73	0.71	0.73	0.71	0.70	0.68	
	3	0.81	0.78	0.76	0.80	0.77	0.76	0.74	0.76	0.74	0.73	0.74	0.73	0.72	0.70	
	4	0.82	0.80	0.78	0.81	0.79	0.78	0.76	0.77	0.76	0.75	0.76	0.75	0.74	0.71	
	5	0.83	0.81	0.80	0.82	0.80	0.79	0.78	0.78	0.77	0.76	0.76	0.76	0.75	0.72	
光源																
品名	メタルハライドランプ															
形式	MF400L-B/BU-P															
光束	42,000 lm															

器具効率 Ft= 79.4%
 上方光束 Fu= 1.8%
 下方光束 Fd= 77.6%

配光分類

BZ-

最大取付間隔

A-A 1.26 H


B-B H

保守率	良	0.50
	中	0.47
	否	0.42

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	437		
10	457		
20	462		
30	382		
40	244		
50	106		
60	29		
70	7		
80	2		
90	2		
100	2		
110	2		
120	3		
130	4		
140	4		
150	4		
160	3		
170	2		
180	2		

単体照度分布(初期)

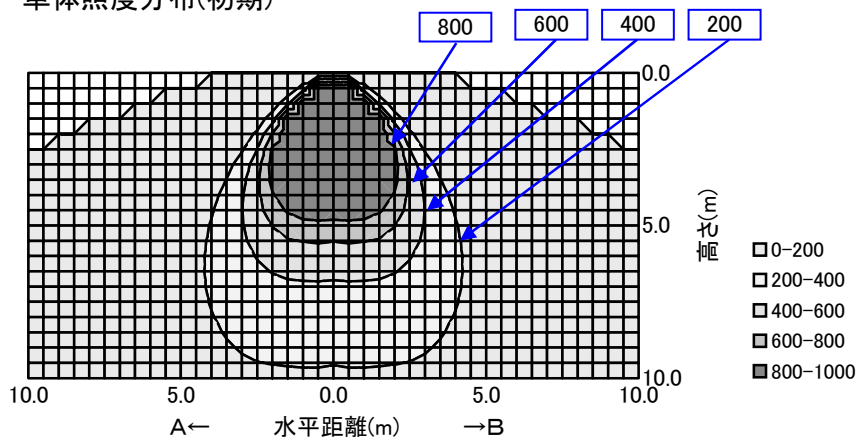

配光曲線

