

日立照明器具 照明特性

形式： MK4011+NH360FL		反 射 率	天井	80%			70%				50%			30%			0%		
<広照形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.55	0.48	0.43	0.54	0.47	0.43	0.39	0.46	0.42	0.39	0.46	0.42	0.39	0.38			
		0.8	0.62	0.56	0.51	0.61	0.55	0.51	0.48	0.54	0.51	0.48	0.53	0.50	0.47	0.46			
		1	0.67	0.61	0.57	0.66	0.60	0.57	0.54	0.59	0.56	0.53	0.58	0.55	0.53	0.51			
		1.25	0.71	0.66	0.62	0.70	0.65	0.61	0.58	0.64	0.61	0.58	0.63	0.60	0.58	0.56			
		1.5	0.73	0.69	0.65	0.72	0.68	0.65	0.62	0.67	0.64	0.62	0.66	0.63	0.61	0.60			
		2	0.77	0.73	0.70	0.76	0.72	0.70	0.67	0.71	0.68	0.67	0.69	0.67	0.66	0.64			
		2.5	0.78	0.75	0.73	0.77	0.74	0.72	0.70	0.73	0.71	0.69	0.71	0.70	0.68	0.66			
		3	0.79	0.77	0.74	0.78	0.76	0.74	0.72	0.74	0.72	0.71	0.73	0.71	0.70	0.68			
光 源		4	0.81	0.79	0.77	0.80	0.78	0.76	0.74	0.76	0.75	0.73	0.74	0.73	0.72	0.70			
品名	高圧ナトリウムランプ	5	0.82	0.80	0.79	0.81	0.79	0.78	0.76	0.77	0.76	0.75	0.76	0.75	0.74	0.72			
形式	NH360FL	7	0.83	0.82	0.81	0.82	0.81	0.80	0.79	0.79	0.79	0.78	0.78	0.77	0.76	0.74			
光束	47,000 lm	10	0.84	0.84	0.83	0.83	0.83	0.82	0.82	0.81	0.80	0.80	0.79	0.79	0.78	0.76			

器具効率 $F_t = 78.8\%$
 上方光束 $F_u = 0.9\%$
 下方光束 $F_d = 77.9\%$

配光分類

BZ-

最大取付間隔

A-A 1.32 H


B-B H

保守率	良	0.78
	中	0.74
	否	0.65

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	389		
10	414		
20	427		
30	369		
40	255		
50	129		
60	36		
70	6		
80	2		
90	1		
100	1		
110	1		
120	1		
130	2		
140	2		
150	2		
160	2		
170	2		
180	2		

単体照度分布(初期)

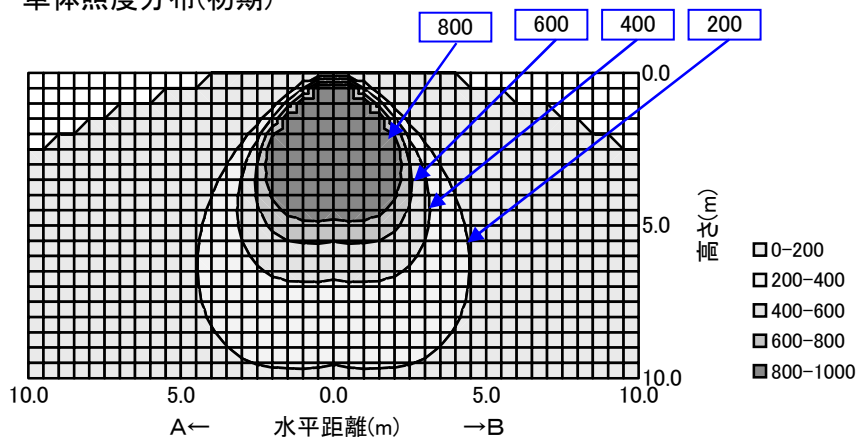

配光曲線

